



**Dayaram**

General Trading L.L.C



**CONSUMER ELECTRICALS**



## **COMPANY OVERVIEW**

Dayaram General Trading LLC is a company that buys and sells products and provides services across the international markets. Established in 1997, the company pioneered the introduction of Chinese and Taiwanese products to the Middle Eastern and African regions, excelling in both exporting and importing. Initially, Dayaram General Trading LLC focused on Readymade Garments and Sundries, partnering with reliable suppliers to procure high-quality products for export and import. (Currently, the company has significantly expanded its portfolio and market reach, leveraging a deep understanding of international trade practices, regulations, and market dynamics).

Dayaram General Trading LLC currently deals in a wide array of products, including FMCG, Electronics, Kitchenware, Readymade Garments, Daily Use Articles, Footwear, Sanitary Ware, Furniture, Mobile Phones & IT Products, Cosmetics, Construction Materials, and Carpets & Upholstery. The company effectively bridges the gap between producers and consumers in various countries, facilitating international trade and ensuring the smooth flow of goods globally.

## **BUSINESS GROWTH**

Dayaram General Trading LLC was established in the United Arab Emirates, a key trading hub strategically positioned to serve the GCC and African markets. It operates as the representative branch of the H. Daya Group in Hong Kong and Mainland China, under the auspices of SK. Daya International Co. Ltd. and VMD. Daya International Co. Ltd.

The H. Daya Group, renowned for overseeing production across multiple factories, is recognized as one of the largest export houses in Hong Kong and China. With offices in various locations and a dedicated team of over 200 professionals, the Group is well-positioned to manage its global operations efficiently and effectively.

## **PROFESSIONAL TEAM**

The Dayaram General Trading team is highly skilled in meeting the evolving needs of the market and customers. In addition to their qualified and experienced office staff, they have a team of merchandisers, both in-house and third-party, to promote their product range and introduce new products to their portfolio.

**ENERGY SAVING LAMPS**

Ø14.5 HIGHT POWER 4U  
Model:A-1006



Ø17 4U  
Model:A-1022



Ø17 HIGHT POWER 5U  
Model:A-1007



Ø17 HIGHT POWER 6U  
Model:A-1008



Ø17 HIGHT POWER 8U  
Model:A-1009



Ø7 MINI HALF SPRIAL  
Model:B-501



Ø7 MINI FULL SPRIAL  
Model:B-502



Ø7 MINI 2U  
Model:B-503



Ø7 MINI 3U  
Model:B-504



### ENERGY SAVING LAMPS



Ø7 MINI 4U  
Model: B-505



Ø7 MINI LOTUS  
Model: B-506



Ø9 MINI 2U  
Model: B-302



Ø12 FLOWER LAMP  
Model: A-1023



Ø17 FLOWER LAMP  
Model: A-1017



Ø17 FLOWER LAMP  
Model: A-1025



Ø10 FLOWER LAMP  
Model: A-1018



Ø17 4U FLOWER LAMP  
Model: A-1019



Ø17 5U FLOWER LAMP  
Model: A-1020



## ENERGY SAVING LAMPS



Ø12 2U  
Model:C-101  
5W/7W/9W/11W/13W/15W/18W/20W



Ø12 3U  
Model:C-102  
18W/24W/26W/30W/30W



Ø9 MINI SPIRAL  
Model:C-103  
15W/18W



Ø12 3U  
Model:B-202  
18W/26W/32W



Ø12 4U  
Model:B-203  
36W



Ø12 HALF SPIRAL  
Model:B-204  
26W/36W



Ø9 MINI 3U  
Model:B-303  
9W/11W/13W/15W/18W



Ø9 PARELLEL 4U  
Model:B-304  
20W/25W



Ø9 MINI HALF SPIRAL  
Model:B-305  
3W/5W/7W

**ENERGY SAVING LAMPS**

Ø14.5 FULL SPIRAL  
Model:A-1005  
65W



Ø9 (Candle Fdrosted/  
Traspare/Cone Glass Cover Energy Saving Lamp)  
Model:E-3001  
3W/5W



Ø9 (Candle Fdrosted/  
Traspare/Cone Glass Cover Energy Saving Lamp)  
Model:E-3002  
3W/5W



Ø17 (Goble Fdrosted/  
Trasparent Glass Cover Energy Saving Lamp)  
Model:E-3005  
7W/9W/11W



Ø12 (Goble Opal/Trasparent  
Glass Cover Energy Saving Lamp)  
Model:E-3006  
11W/13W



Ø12 (Goble Opal/  
Trasparent Glass Cover Energy Saving Lamp)  
Model:E-3007  
15W/18W/20W/24W/26W



Ø12 (Duble U PL 2pins)  
Model:E-3012  
9W/11W/13W/18W/26W



Ø12 (Single U PL 2pins)  
Model:E-3010  
7W/9W/11W/13W



(T Ring Tube Energy Lamp)  
Model:E-3009  
22W

**ENERGY SAVING LAMPS**

Ø12 SPIRAL  
Model:C-104  
26W/36W



Ø12 2U  
Model:B-201  
5W/7W/9W/11W/13W/15W/18W



Ø9 (Mushroom Frosted/  
Reflector Glass Cove Energy Saving Lamp)  
Model:E-3003  
3W/5W/7W



Ø12 FULL SPIRAL  
Model:B-205  
26W/36W



Ø9 MINI 2U  
Model:B-301  
3W/5W/7W/9W/11W/13W/15W



Ø12 (Prismatic Cylinder  
Energy Saving Lamp)  
Model:E-3008  
15W/18W/25W



Ø9 MINI FULL SPIRAL  
Model:B-306  
7W/9W/11W/13W/15W/18W



Ø14.5 HALF SPIRAL  
Model:A-1004  
65W



Ø9 (Mushroom Frosted/  
Reflector Glass Cove Energy Saving Lamp)  
Model:E-3004  
9W/11W/13W



**MODEL: KN-2324RDL**  
6V2Ah Rechargeable Battery  
24pcs Bright LED Light  
3pcs Bright LED Torch  
FM Scan Radio



**MODEL: KN-2513L**  
6V4.5Ah Rechargeable Battery  
12x0.5W Hi-Power LED Light  
0.5W Hi-Power LED Torch



**MODEL: KN-2324L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light  
3pcs Bright LED Torch



**MODEL: KN-2327L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light  
3pcs Bright LED Torch



**MODEL: KN-2319L**  
4V900Ah Rechargeable Battery  
16pcs Bright LED Light  
3pcs Bright LED Torch



**MODEL: KN-2339L**  
6V4.5Ah Rechargeable Battery  
21pcs Bright LED Light  
3pcs Bright LED Torch



**MODEL: KN-2335L**  
4V2Ah Rechargeable Battery  
16pcs Bright LED Light  
3pcs Bright LED Torch



**MODEL: KN-2310L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light



**MODEL: KN-2326L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light



**MODEL: KN-2382L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light  
7pcs Bright LED Torch  
FM/AM Radio



**MODEL: KN-2306L**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light  
7pcs Bright LED Torch  
FM/AM Radio



**MODEL: KN-710L**  
6V4.5Ah Rechargeable Battery  
36pcs Bright LED Light



**MODEL: KN-560L**  
6V4.5Ah Rechargeable Battery  
36pcs Bright LED Light



**MODEL: KN-710PL**  
6V4.5Ah Rechargeable Battery  
24pcs Bright LED Light  
1x11W PI Tube



**MODEL: KN-560PL**  
6V4.5Ah Rechargeable Battery  
20pcs Bright LED Light  
1x11W PI Tube



**MODEL: KN-2339**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube  
6V0.5A Bulb Torch



**MODEL: KN-2369**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube  
6V0.5A Bulb Torch



**MODEL: KN-822**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube  
6V0.5A Bulb Torch



**MODEL: KN-2306**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube  
6V0.5A Bulb Torch  
FM/AM Radio



**MODEL: KN-2310**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube



**MODEL: KN-2311**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube



**MODEL: KN-710P**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube



**MODEL: KN-560P**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube



**MODEL: KN-2382**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes  
6V0.5A Bulb Torch  
FM/AM Radio



**MODEL: KN-2367**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes  
6V0.5A Bulb Torch  
FM/AM Radio



**MODEL: KN-2366**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes  
6V0.5W Bulb Torch



**MODEL: KN-2326**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes



**MODEL: KN-710**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes




**MODEL: KN-560**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes

**MODEL: KN-3020L**

2x4V900mAh Rechargeable Batteries  
20pcs Bright LED Light

**MODEL: KN-3336L**

4x4V900mAh Rechargeable Batteries  
36pcs Bright LED Light

**MODEL: KN-3366L**

6V2.8Ah Rechargeable Battery  
35pcs Bright LED Light

**MODEL: KN-218L**

6V2.8Ah Rechargeable Battery  
36pcs Bright LED Light

**MODEL: KN-3398L**

6V4.5Ah Rechargeable Battery  
40pcs Bright LED Light

**MODEL: KN-3324L**

6V2Ah Rechargeable Battery  
24pcs Bright LED Light

**MODEL: KN-3360L**

6V2.8Ah Rechargeable Battery  
60pcs Bright LED Light

**MODEL: KN-3100L**

6V2.8Ah Rechargeable Battery  
100pcs Bright LED Light

**MODEL: KN-3120L**

6V4.5Ah Rechargeable Battery  
120pcs Bright LED Light

**MODEL: KN-3392L**

6V4.5Ah Rechargeable Battery  
60pcs Bright LED Light

**MODEL: KN-3315L**

6V4.5Ah Rechargeable Battery  
1x14W Fluorescent Tube  
40pcs Bright LED Light

**MODEL: KN-3318L**

6V4.5Ah Rechargeable Battery  
1x20W Fluorescent Tube  
40pcs Bright LED Light



**MODEL: KN-1830RD**  
6V4.5Ah Rechargeable Battery  
3x10W Fluorescent Tubes  
FM Scan Radio



**MODEL: KN-1830T**  
6V4.5Ah Rechargeable Battery  
3x10W Fluorescent Tubes  
6V0.5A Bulb Torch



**MODEL: KN-1830**  
6V4.5Ah Rechargeable Battery  
3x10W Fluorescent Tubes



**MODEL: KN-1820RD**  
6V4.5Ah Rechargeable Battery  
2x10W Fluorescent Tubes  
FM Scan Radio



**MODEL: KN-1820T**  
6V4.5Ah Rechargeable Battery  
2x10W Fluorescent Tubes  
6V0.5A Bulb Torch



**MODEL: KN-1820**  
6V4.5Ah Rechargeable Battery  
2x10W Fluorescent Tubes



**MODEL: KN-10**  
6V4.5Ah Rechargeable Battery  
2x10W Fluorescent Tubes



**MODEL: KN-189T**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube  
6V 0.5A Bulb Torch



**MODEL: KN-189**  
6V4.5Ah Rechargeable Battery  
1x9W PL Tube



**MODEL: KN-189C**  
6V4.5Ah Rechargeable Battery  
1x9W Spiral Tube



**MODEL: KN-6011**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube



**MODEL: KN-1806**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes



**MODEL: KN-06**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes



**MODEL: KN-06N**  
6V4.5Ah Rechargeable Battery  
2x6W Fluorescent Tubes



**MODEL: KN-889P**  
6V4.5Ah Rechargeable Battery  
1x11W PL Tube

**PC-6011L**

- 11 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6115L**

- 15 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6015L**

- 15 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6018L**

- 18 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6019L**

- 19 Leds
- 2pcs 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6125L**

- 25 Leds
- 2pcs 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6030L**

- 30 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6036L**

- 36 Leds
- 4V 1AH rechargeable lead-acid battery
- AC/DC function

**PC-6038L**

- 38 Leds
- 2pcs 4V 1AH rechargeable lead-acid battery
- AC/DC function

**QC7286A**

- \* 13A250V
- \* 2 WAYS SQUARE-PIN EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 36 X 26.5 CM

**QC7286B**

- \* 13A250V
- \* 2 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 36 X 26.5 CM

**QC7386A**

- \* 13A250V
- \* 3 WAYS SQUARE-PIN EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 36.5 X 26.5 CM

**QC7386B**


- \* 13A250V
- \* 3 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 36.5 X 26.5 CM

**QC7486A**

- \* 13A250V
- \* 4 WAYS SQUARE-PIN EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 39 X 26.5 CM

**QC7486B**

- \* 13A250V
- \* 4 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 60 X 39 X 26.5 CM

**QC6586A**

- \* 13A250V
- \* 5 WAYS SQUARE-PIN EXTENSION SOCKET
- \* 40 PCS/CTN
- \* 57 X 44 X 38 CM

**QC6586B**

- \* 13A250V
- \* 5 WAYS UNIVERSAL EXTENSION SOCKET
- \* 40 PCS/CTN
- \* 57 X 44 X 38 CM

**QC6686A**

- \* 13A250V
- \* 6 WAYS SQUARE-PIN EXTENSION SOCKET
- \* 40 PCS/CTN
- \* 57 X 49.5 X 38 CM

**QC6686B**

- \* 13A250V
- \* 6 WAYS UNIVERSAL EXTENSION SOCKET
- \* 40 PCS/CTN
- \* 57 X 49.5 X 38 CM



QC303AS		QC303BS		QC303CS		QC303DS	
* QC303AS	13A250V	3 WAYS	SQUARE-PIN WALL SOCKET WITH SQUARE-PIN	36 PCS/CTN	64 X 31.5 X 26.5 CM		
* QC303BS	10A250V	3 WAYS	SQUARE-PIN WALL SOCKET WITH 2-ROUND-PIN	36 PCS/CTN	64 X 31.5 X 26.5 CM		
* QC303CS	10A250V	3 WAYS	SQUARE-PIN WALL SOCKET WITH 3-ROUND-PIN	36 PCS/CTN	64 X 31.5 X 26.5 CM		
* QC303DS	16A250V	3 WAYS	SQUARE-PIN WALL SOCKET WITH 15A-3-ROUND-PIN	36 PCS/CTN	64 X 31.5 X 26.5 CM		



QC414A		QC414B		QC414C		QC414D	
* QC414A	13A250V	4 WAYS	UNIVERSAL WALL SOCKET WITH SQUARE-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414B	10A250V	4 WAYS	UNIVERSAL WALL SOCKET WITH 2-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414C	10A250V	4 WAYS	UNIVERSAL WALL SOCKET WITH 5A-3-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414D	16A250V	4 WAYS	UNIVERSAL WALL SOCKET WITH 15A-3-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		



QC404		QC414BS		QC414CS		QC414DS	
* QC404	13A250V	4 WAYS	SQUARE-PIN WALL SOCKET WITH SQUARE-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414BS	10A250V	4 WAYS	SQUARE-PIN WALL SOCKET WITH 2-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414CS	10A250V	4 WAYS	SQUARE-PIN WALL SOCKET WITH 5A-3-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		
* QC414DS	16A250V	4 WAYS	SQUARE-PIN WALL SOCKET WITH 15A-3-ROUND-PIN	24 PCS/CTN	60 X 29.5 X 23.5 CM		



QC9903	
* 13A250V	
* 3 WAY UNIVERSAL EXTENSION SOCKET	
* 24 PCS/CTN	
* 57.5 X 32 X 29 CM	



QC9904	
* 13A250V	
* 4 WAY UNIVERSAL EXTENSION SOCKET	
* 24 PCS/CTN	
* 57.5 X 38 X 29 CM	



QC9905	
* 13A250V	
* 5 WAY UNIVERSAL EXTENSION SOCKET	
* 24 PCS/CTN	
* 57.5 X 44 X 28.5 CM	

**QC9806**

- \* 13A250V
- \* 2 WAYS UNIVERSAL EXTENSION SOCKET
- \* 60 PCS/CTN
- \* 66.5 X 26.5 X 51.5 CM

**QC0124C**

- \* 13A250V
- \* 4 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 69.5 X 30.5 X 39 CM

**QC9807**

- \* 13A250V
- \* 3 WAYS UNIVERSAL EXTENSION SOCKET
- \* 60 PCS/CTN
- \* 66.5 X 32.5 X 51.5 CM

**QC0126C**

- \* 13A250V
- \* 6 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 69.5 X 36 X 38 CM

**QC9808**

- \* 13A250V
- \* 4 WAYS UNIVERSAL EXTENSION SOCKET
- \* 60 PCS/CTN
- \* 66.5 X 38.5 X 51.5 CM

**QC0128C**

- \* 13A250V
- \* 8 WAYS UNIVERSAL EXTENSION SOCKET
- \* 24 PCS/CTN
- \* 69.5 X 42.5 X 37 CM

**QC9809**

- \* 13A250V
- \* 5 WAYS UNIVERSAL EXTENSION SOCKET
- \* 60 PCS/CTN
- \* 66.5 X 44.5 X 51.5 CM

**QC9923**

- \* 13A250V
- \* 6WAYS UNIVERSAL(AMERICAN) SOCKET WITH SURGE PROTECTOR & LIGHTED SWITCH
- \* 60 PCS/CTN
- \* 66.5 X 44.5 X 51.5 CM

**QC9810**

- \* 13A250V
- \* 6 WAYS UNIVERSAL EXTENSION SOCKET
- \* 60 PCS/CTN
- \* 66.5 X 50.5 X 51.5 CM

**QC9924**

- \* 13A250V
- \* 8WAYS UNIVERSAL(AMERICAN) SOCKET WITH SURGE PROTECTOR & INDIVIDUAL LIGHTED SWITCHES
- \* 24 PCS/CTN
- \* 54.5 X 33.5 X 27.5 CM



**QC901**  
 \* 110V-220V-18W  
 \* CUP WARMER (KEEP 60°C)  
 \* 40 PCS/CTN  
 \* 52 X 28.5 X 19.5 CM



**QC902**  
 \* 110V-220V-18W  
 \* CUP WARMER (KEEP 60°C)  
 \* 40 PCS/CTN  
 \* 52 X 28.5 X 19.5 CM



**QC903**  
 \* 110V-220V-18W  
 \* CUP WARMER (KEEP 60°C)  
 \* 40 PCS/CTN  
 \* 52 X 28.5 X 19.5 CM



**QC8301A**  
 \* 13A250V  
 \* UNIVERSAL REEL SOCKET WITH LIGHT  
 \* 60 PCS/CTN  
 \* 77 X 33.5 X 41 CM



**QC8800D**  
 \* 13A250V  
 \* HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-150M)  
 \* 4 PCS/CTN  
 \* 49 X 44.5 X 31.5 CM




**QC8800E**  
 \* 13A250V  
 \* OUTLET REEL SOCKET (WIRE LENGTH:25-150M)  
 \* 4 PCS/CTN  
 \* 49 X 44.5 X 31.5 CM



**QC8800F**  
 \* 13A250V  
 \* HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-150M)  
 \* 4 PCS/CTN  
 \* 49 X 44.5 X 31.5 CM



QC8811A	QC8811B	QC8811C	QC8811D
* QC8811A	13A250V	HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-50M)	4 PCS/CTN 47 X 34 X 31.5 CM
* QC8811B	13A250V	HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-50M)	4 PCS/CTN 47 X 34 X 31.5 CM
* QC8811C	13A250V	HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-50M)	4 PCS/CTN 47 X 34 X 31.5 CM
* QC8811D	13A250V	HEAVY UNIVERSAL REEL SOCKET WITH LIGHTED SWITCH (WIRE LENGTH:25-50M)	4 PCS/CTN 47 X 34 X 31.5 CM

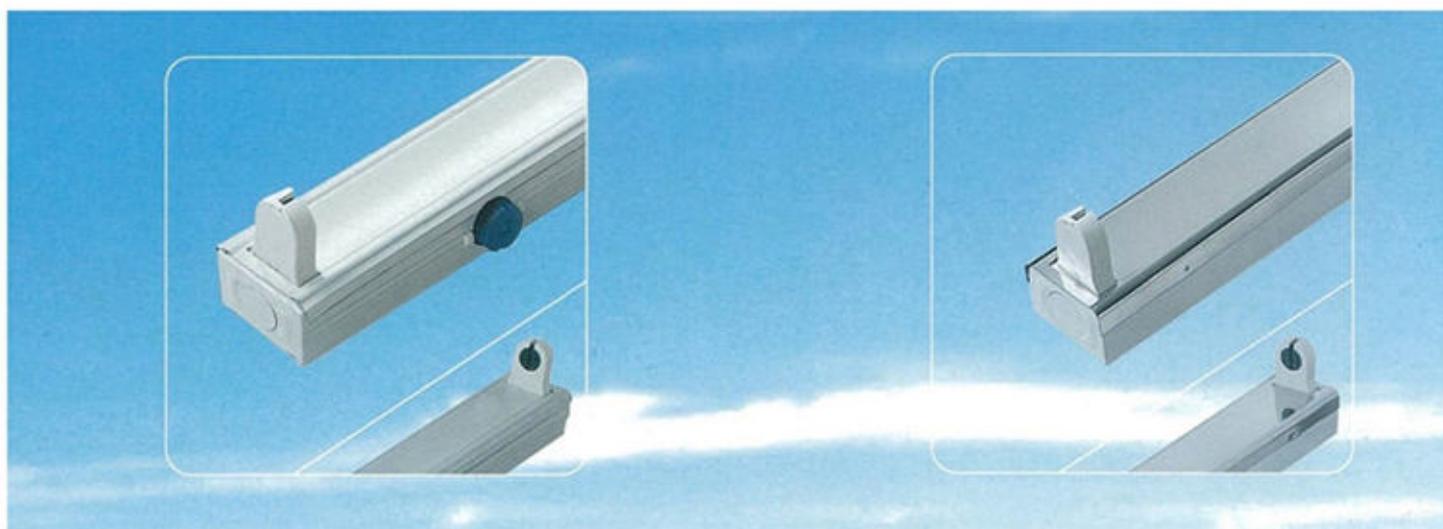

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/Ctn)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAM-A140	40W	14.90	16	0.54	126X22.7X16
LAM-A130	30W	13.40	16	0.48	95X22.7X16
LAM-A120	20W	11.30	16	0.37	64X22.7X16

额定电压 Voltage(v): 220V/50HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/Ctn)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAM-B140	40W	14.90	16	0.54	126X22.7X16
LAM-B130	30W	13.40	16	0.48	95X22.7X16
LAM-B120	20W	11.30	16	0.37	64X22.7X16

额定电压 Voltage(v): 220V/50HZ



MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/Ctn)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAM-A140C	40W	16.25	14	0.54	124.5X23X14.5
LAM-A130C	30W	14.83	14	0.48	95X23X14.5
LAM-A120C	20W	12.50	14	0.37	64.5X23X14.5

额定电压 Voltage(v): 220V/50HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/Ctn)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAM-B140C	40W	16.25	14	0.54	124.5X23X14.5
LAM-B130C	30W	14.83	14	0.48	95X23X14.5
LAM-B120C	20W	12.50	14	0.37	64.5X23X14.5

额定电压 Voltage(v): 220V/50HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/Ctn)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAM-C240	2X40W	13.40	8	0.54	126X17.5X15
LAM-C230	2X30W	10.70	8	0.48	96X17.5X15
LAM-C220	2X20W	9.80	8	0.37	66X19X15

额定电压 Voltage(v): 220V/50HZ



Model	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/CTN)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAMX-A140	40W	14.55	10	0.65	127X23.5X25
LAMX-A130	30W	12.40	10	0.65	96X23.5X25
LAMX-A120	20W	8.72	10	0.65	65X23.5X25

额定电压Voltage(V)220V/50HZ

Model	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (Pcs/CTN)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAMX-B140	40W	14.55	10	0.65	127X23.5X25
LAMX-B130	30W	12.40	10	0.65	96X23.5X25
LAMX-B120	20W	8.72	10	0.65	65X23.5X25

额定电压Voltage(V)220V/50HZ



Model	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAMX-E140	40W	9.50	4	0.54	126.5X20.5X24.5
LAMX-E130	30W	8.00	4	0.48	97X21X25
LAMX-E120	20W	6.30	4	0.37	66X21X25

额定电压Voltage(V)220V/50HZ

Model	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因素 Power factor(λ)	包装尺寸 Packing size(cm)
LAMX-E240	2X40W	10.4	3	0.54	126.5X23X20
LAMX-E230	2X30W	8.30	3	0.48	95.5X23X20
LAMX-E220	2X20W	6.50	3	0.37	64.5X23X20

额定电压Voltage(V)220V/50HZ




LFHM-R440

MODEL	功率 Watts(W)	装箱数量 (Pcs/Ctn)	包装尺寸 Packing size(cm)
LFA-R440	4×40W	2	124.5×17.5×61
LFA-R430	4×30W	2	94.5×17.5×61
LFA-R420	4×20W	2	63.5×17.5×61
LFA-R340	3×40W	2	124.5×18.5×61
LFA-R330	3×30W	2	94.5×18.5×61
LFA-R220	3×20W	2	63.5×17.5×61
LFA-R240	2×40W	2	124.5×31.5×17.5
LFA-R230	2×30W	2	94.5×31.5×17.5
LFA-R220	2×20W	2	63.5×31.5×17.5
LFA-R140	1×40W	2	124.5×20×18.5
LFA-R130	1×30W	2	94.5×20×18.5
LFA-R120	1×20W	2	63.5×20×18.5

MODEL	功率 Watts(W)	装箱数量 (Pcs/Ctn)	包装尺寸 Packing size(cm)
LFHM-R440	4×40W	2	124.5×17.5×61
LFHM-R430	4×30W	2	94.5×17.5×61
LFHM-R420	4×20W	2	63.5×17.5×61
LFHM-R340	3×40W	2	124.5×18.5×61
LFHM-R330	3×30W	2	94.5×18.5×61
LFHM-R220	3×20W	2	63.5×17.5×61
LFHM-R240	2×40W	2	124.5×31.5×17.5
LFHM-R230	2×30W	2	94.5×31.5×17.5
LFHM-R220	2×20W	2	63.5×31.5×17.5
LFHM-R140	1×40W	2	124.5×20×18.5
LFHM-R130	1×30W	2	94.5×20×18.5
LFHM-R120	1×20W	2	63.5×20×18.5



MODEL	功率 Watts(W)	装箱数量 (Pcs/Ctn)	包装尺寸 Packing size(cm)
LFC-A440	4X40W	2	125X62X18
LFC-A420	4X20W	2	64X62X18
LFC-A340	3X40W	2	125X62X18
LFC-A320	3X20W	2	64X62X18
LFC-A240	2X40W	2	125X32X18
LFC-A220	2X20W	2	64X32X18
LFC-A140	1X40W	2	125X19.5X18
LFC-A120	1X20W	2	64X19.5X18

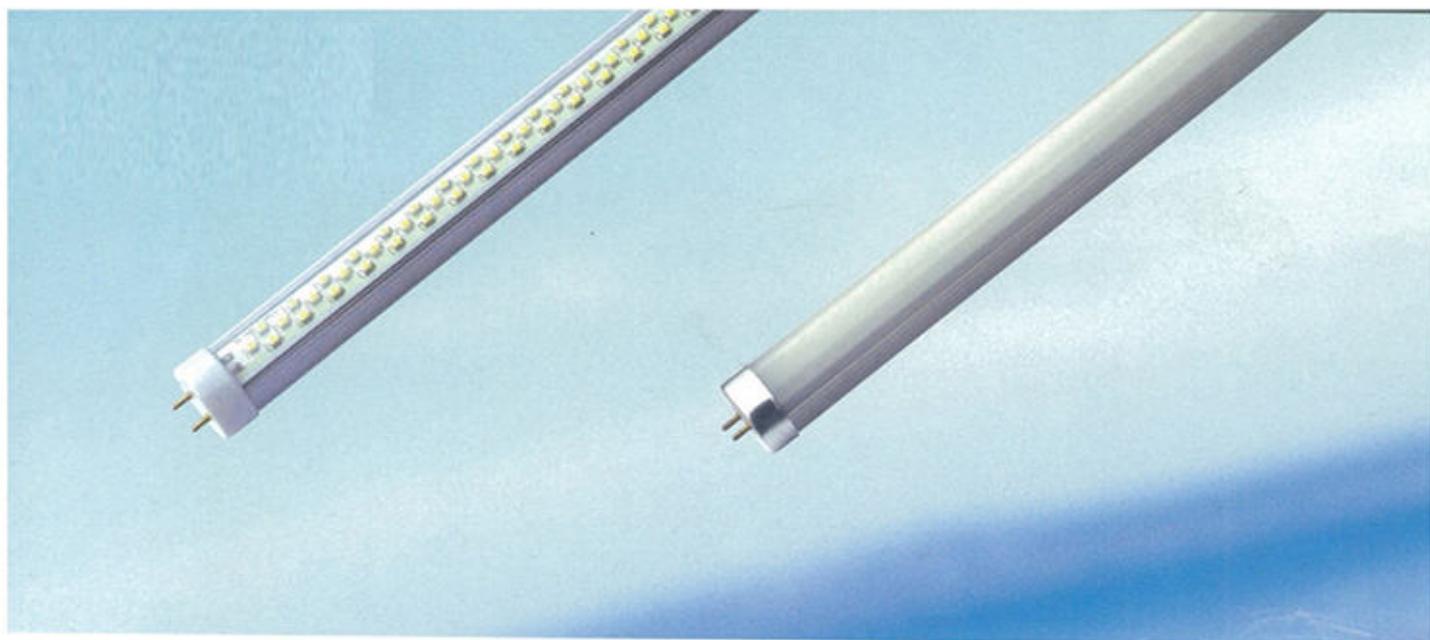

Model	功率 Watts(W)	色温 Color Temperature(K)	长度 Length(mm)	光通量 Luminous Flux(LM)
LED-T8L8-SMD-B	8W	3000-13000K	600	720
LED-T8L18-SMD-B	18W	3000-13000K	1200	1658
LED-T8L22-SMD-B	22W	3000-13000K	1200	1990
LED-T8L25-SMD-B	25W	3000-13000K	1500	2270

工作电压Voltage: AC85-265V 50-60Hz  
 灯头连接规格Lamp Holder: G13  
 使用寿命Life Span: 50000H  
 材质Material: Aluminum Alloy铝合金外壳

Model	功率 Watts(W)	色温 Color Temperature(K)	长度 Length(mm)	光通量 Luminous Flux(LM)
LED-T8L8-SMD-C	8W	3000-13000K	600	720
LED-T8L18-SMD-C	18W	3000-13000K	1200	1658
LED-T8L22-SMD-C	22W	3000-13000K	1200	1990
LED-T8L25-SMD-C	25W	3000-13000K	1500	2270

工作电压Voltage: AC85-265V 50-60Hz  
 灯头连接规格Lamp Holder: G13  
 使用寿命Life Span: 50000H  
 材质Material: Aluminum Alloy铝合金外壳



MODEL	功率 Watts(W)	装灯数量 (Pcs/Cin)	功率因素 Power factor(%)
MBAL-B140	40W	20	0.54
MBAL-B130	30W	20	0.48
MBAL-B120	20W	20	0.37

长(Length): 13cm  
 宽(Diameter): 3.8cm  
 高(Height): 2.5cm  
 寿命(Life span): 2Y  
 包装尺寸Packing size(cm): 14 × 23.5 × 11.5  
 毛重G.W.(kg): 7.40  
 额定电压Voltage(v): 220V/50HZ

MODEL	功率 Watts(W)	装灯数量 (Pcs/Cin)	功率因素 Power factor(%)
MBAL-C140	40W	20	0.54
MBAL-C130	30W	20	0.48
MBAL-C120	20W	20	0.37

长(Length): 14cm  
 宽(Diameter): 3.8cm  
 高(Height): 2.5cm  
 寿命(Life span): 2Y  
 包装尺寸Packing size(cm): 21 × 15.2 × 15  
 毛重G.W.(kg): 8.70  
 额定电压Voltage(v): 220V/50HZ

MODEL	功率 Watts(W)	装灯数量 (Pcs/Cin)	功率因素 Power factor(%)
MBAL-D140	40W	20	0.54
MBAL-D130	30W	20	0.48
MBAL-D120	20W	20	0.37

长(Length): 14cm  
 宽(Diameter): 3.8cm  
 高(Height): 2.5cm  
 寿命(Life span): 2Y  
 包装尺寸Packing size(cm): 28 × 22 × 6.5  
 毛重G.W.(kg): 10.00  
 额定电压Voltage(v): 220V/50HZ



型号/Model: LED-BUL-A5W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:5W  
 光通量/Lumen Flux:310-450Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):52X90  
 材质/Material :Aluminum

型号/Model: LED-BUL-B5W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:5W  
 光通量/Lumen Flux:350-440Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):50X95  
 材质/Material :Aluminum

型号/Model: LED-BUL-C3W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:3W  
 光通量/Lumen Flux:600Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):50X110  
 材质/Material :Aluminum

型号/Model: LED-BUL-D3W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:3W  
 光通量/Lumen Flux:190-310Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):62X95  
 材质/Material :Aluminum







型号/Model: LED-SL-A3W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:3W  
 光通量/Lumen Flux:190-310Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):50X80  
 材质/Material :Aluminum

型号/Model: LED-SL-B3W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:3W  
 光通量/Lumen Flux:190-310Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):50X80  
 材质/Material :Aluminum

型号/Model: LED-SL-C4W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:4W  
 光通量/Lumen Flux:220-300Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):77X80  
 材质/Material :Aluminum

型号/Model: LED-SL-D7W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:7W  
 光通量/Lumen Flux:300-500Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 灯头/Base E27  
 尺寸/Size(mm):93X82  
 材质/Material :Aluminum





型号/Model: LED-DL-D5W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:5W  
 光通量/Lumen Flux:350-400Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 尺寸/Size(mm):120X70  
 材质/Material :Aluminum

型号/Model: LED-DL-E5W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:5W  
 光通量/Lumen Flux:350-400Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 尺寸/Size(mm):107X68  
 材质/Material :Aluminum

型号/Model: LED-DL-F8W  
 输入电压/Input:80VAC-260VAC 50/60Hz  
 功率/Rated Power:8W  
 光通量/Lumen Flux:560-640Lm  
 色温值/Color Temperature:3100K/4300K/6500K  
 尺寸/Size(mm):107X70  
 材质/Material :Aluminum



MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因数 Power factor(λ)	包装尺寸 Packing size(cm)
CEL-E21	21W	6.23	20	0.65	68.5X27.5X54.5
CEL-E38	38W	10.10	10	0.65	74X34X34.5

额定电压Voltage(v):110V/60HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因数 Power factor(λ)	包装尺寸 Packing size(cm)
CEL-G21	21W	8.00	20	0.65	68X26.5X51
CEL-G38	38W	9.90	10	0.65	74X35X31

额定电压Voltage(v):110V/60HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因数 Power factor(λ)	包装尺寸 Packing size(cm)
CEL-F21	21W	8.83	20	0.65	68.5X27.5X54.5
CEL-F38	38W	10.90	10	0.65	74X34X34.5

额定电压Voltage(v):110V/60HZ

MODEL	功率 Watts(W)	毛重 G.W.(kg)	装箱数量 (PCS/CTN)	功率因数 Power factor(λ)	包装尺寸 Packing size(cm)
CEL-I21	21W		20	0.65	
CEL-I38	38W		10	0.65	

额定电压Voltage(v):110V/60HZ



N1012

N1022

N1032

N1042




N1018

N1018L

N1019

N1019L

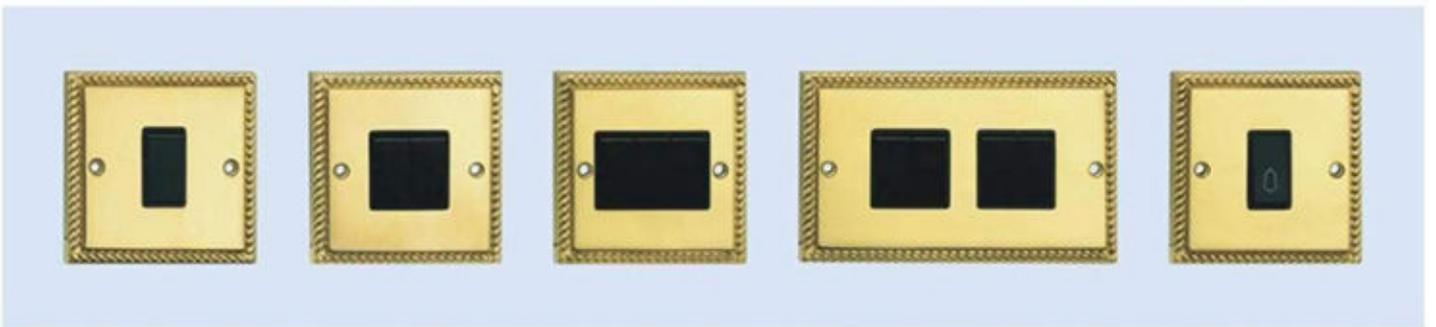


SG01

SG02

SG03

SG04

SG05

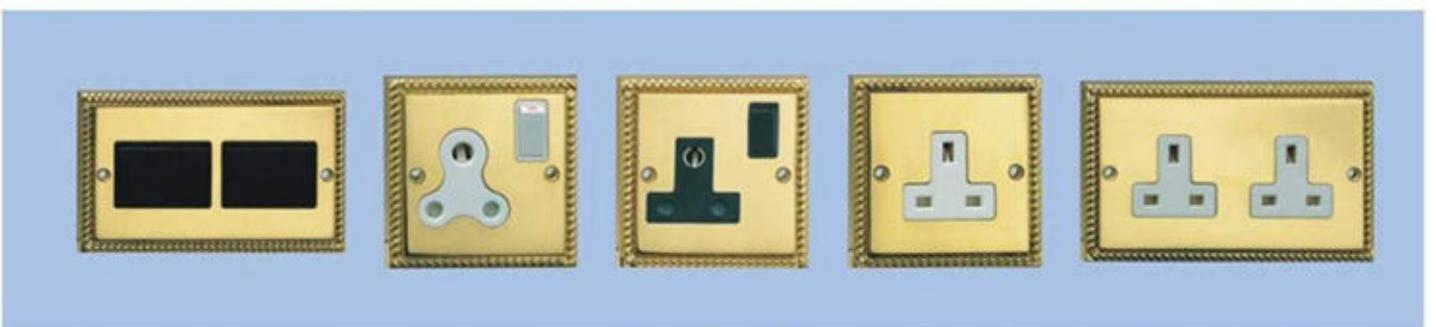


SG06

SG07

SG08

SG09

SG10

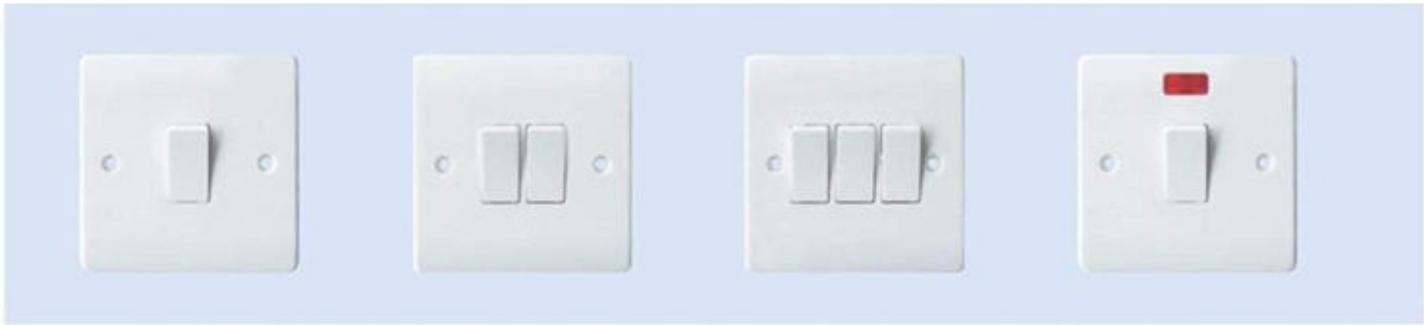


VZ0212

VZ0222

VZ0232

VZ0220

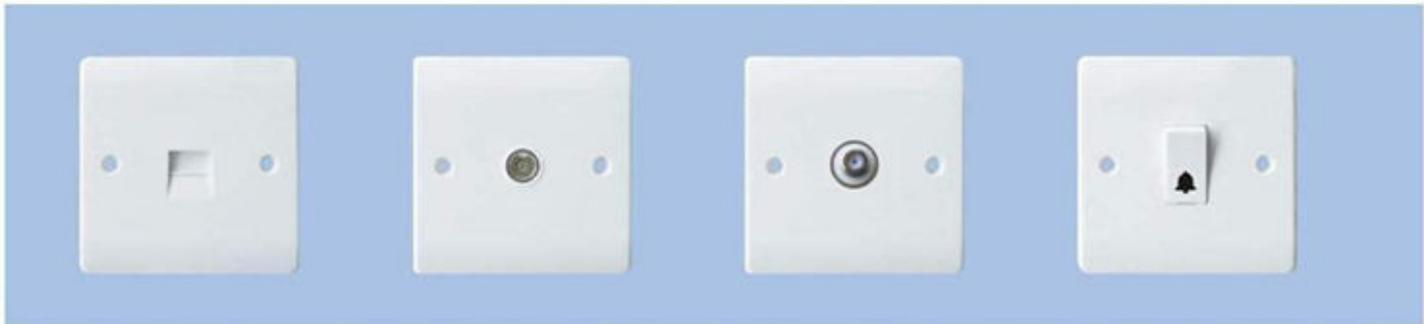


VZ0250

VZ0258

VZ0259

VZ0260

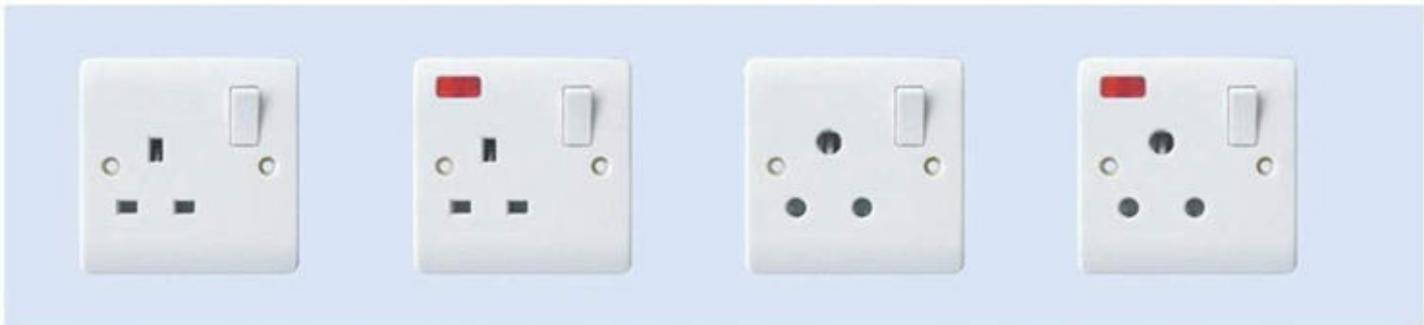

VZ0247

VZ0247L

VZ0235

VZ0235L



VZ0261

VZ0262

VZ0248

VZ0248L



101

102

103

104



105

106

107

108




109

110

111

112

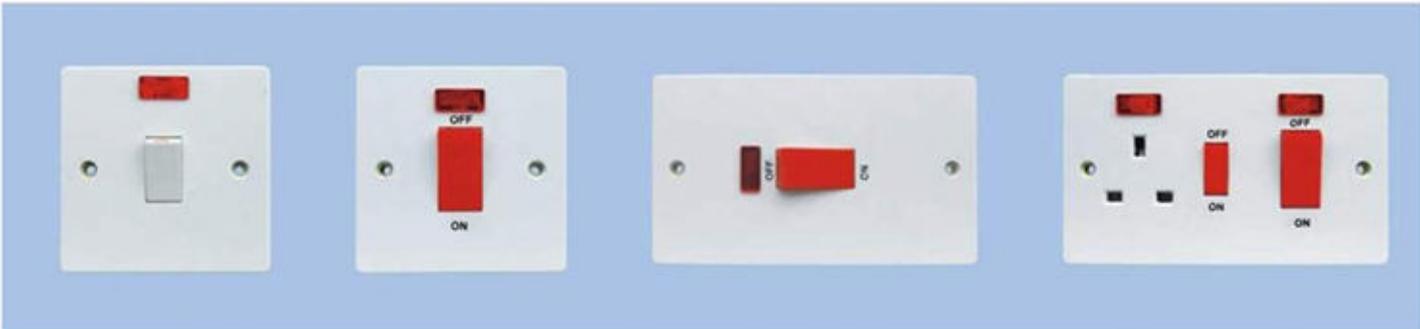

3957

3950

3953

3954



861

861W

862

863

864

865



866

867

868

915

913

7480



7296

7196L

7196

7195L



5399L

5399

7296L

7195



7387

7387L

NEW7387L

NEW7387

SS246



601

602

603

604

8330



6201

6202

6203

6204

6205



7101

7202

7303

7404

7505



W872

W873

W874

W875

0152



0153

W366E

W366



222

C209AW

220W

9053

9054

9036



9039

209AW

9056

9057

9058

9059



209BWS

209BW

C209BW

T209BW

9038



9039

T3565

506

871

872



S209AW

S209BW

810

9044

9055

**PC-150C(8153)**

- Continuous 150W peak 300W
- Input 12VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/color box, 20pcs/ctn
- G.W./N.W.17/16KGS
- Meas: 34x30x38cm 12600pcs/20FCL

**PC-150G  
PC-150G USB(8157)**

- Continuous 150W peak 300W
- Input 12VDC Output 100-120/220-240VAC
- 5VDC 500mA USB output Selected
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/color box, 20pcs/ctn
- G.W./N.W.16/15KGS
- Meas: 35x42x44cm 13200pcs/20FCL

**PC-200A(8201)**

- Continuous 200W peak 400W
- Input 12/24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/double blister 20pcs/ctn
- G.W./N.W.10/9KGS
- Meas: 38x30x38cm 4200pcs/20FCL

**PC-200C  
PC-200C USB(8203)**

- Continuous 200W peak 400W
- Input 12VDC Output 100-120/220-240VAC
- 5VDC 500mA USB output Selected
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/color box 20pcs/ctn
- G.W./N.W.15/14KGS
- Meas: 46x42x23cm 13200pcs/20FCL

**PC-300B  
PC-300B USB(8302)**

- Continuous 300W peak 600W
- Input 12/24VDC Output 100-120/220-240VAC
- 5VDC 500mA USB output Selected
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/color box 20pcs/ctn
- G.W./N.W.22/21KGS
- Meas: 48x33x35cm 10920pcs/20FCL

**PC-300C(8303)**

- Continuous 300W peak 600W
- Input 12/24VDC Output 100-120/220-240VAC
- 5VDC 500mA USB output Selected
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing:1 pc/color box, 20pcs/ctn
- G.W./N.W.23/22KGS
- Meas: 48x33x35cm 10920pcs/20FCL





### PC-300G PC-300G USB(8307)

Continuous 300W peak 600W  
Input Voltage: 12/24VDC  
5VDC 500mA USB output Selected  
Efficiency:>90%  
Modified sine wave  
Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ  
Static current: <300mA  
Packing: 1 pc/color box, 20pcs/ctn  
G.W./N.W.22/21KGS  
Meas: 43x28x35cm 10920pcs/20FCL  
Low and high input voltage protection  
Output overloading protection  
Short circuit protection



### PC-400 PC-400 USB(8302)

Continuous 400W peak 800W  
Input Voltage: 12/24VDC  
5VDC 500mA USB output Selected  
Efficiency:>90%  
Modified sine wave  
Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ  
Static current: <300mA  
Packing: 1 pc/color box, 20pcs/ctn  
G.W./N.W.22/21KGS  
Meas: 48x33x35cm 10920pcs/20FCL  
Low and high input voltage protection  
Output overloading protection  
Short circuit protection



### PC-500 USB(8501)

Continuous 500W peak 1000W  
Input Voltage: 12/24VDC  
Efficiency:>90%  
Modified sine wave  
Low and high input voltage protection  
Output overloading protection  
Short circuit protection  
G.W./N.W.24/23KGS  
Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ  
Static current: <400mA  
With cooling fan: yes  
Packing: 1 pc/color box, 20pcs/ctn  
Meas: 53x32x35cm 9240pcs/20FCL



### PC-500B PC-500B USB(8502)

Continuous 500W peak 1000W  
Input Voltage: 12/24VDC  
5VDC 500mA USB output Selected  
Efficiency:>90%  
Modified sine wave  
Low and high input voltage protection  
Output overloading protection  
Short circuit protection  
G.W./N.W.28/26KGS  
Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ  
Static current: <400mA  
With cooling fan: yes  
Packing: 1 pc/color box, 20pcs/ctn  
Meas: 52x32x35cm 9240pcs/20FCL





### PC-600B PC-600B USB(8602)

- Continuous 600W peak 1200W
- Input Voltage: 12/24VDC
- Efficiency:>90%
- Modified sine wave
- Low and high input voltage protection
- Output overloading protection
- Short circuit protection
- G.W./N.W.24/23KGS
- Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ
- Packing: 1 pc/color box, 20pcs/ctn
- Meas: 52x32x35cm 9240pcs/20FCL



### PC-600C PC-600C USB(8603)

- Continuous 600W peak 1200W
- Input Voltage: 12/24VDC
- 5VDC 500mA USB output Selected
- Efficiency:>90%
- Modified sine wave
- Low and high input voltage protection
- Output overloading protection
- Short circuit protection
- G.W./N.W.24/23KGS
- Output voltage and Frequency: 110VAC/120VAC 60HZ  
220VAC/230VAC/240VAC 50HZ
- Packing: 1 pc/color box, 20pcs/ctn
- Meas: 52x41x25cm 9240pcs/20FCL



### PC-1500B PC-1500B LED(9152)

- Continuous 1500W peak 3000W
- Input 12/24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing: 1 pc/color box, 4pcs/ctn
- G.W./N.W.19/18KGS
- Meas: 48x38x27cm 1728pcs/20FCL



### PC-2000B PC-2000B LED(9202)


- Continuous 2000W peak 4000W
- Input 12/24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing: 1 pc/color box, 4pcs/ctn
- G.W./N.W.30/28KGS
- Meas: 52x48x28cm 1728pcs/20FCL



### PC-1500A (9151)

- Continuous 1500W peak 3000W
- Input 12/24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency:>90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing: 1 pc/color box, 6pcs/ctn
- G.W./N.W.26/25KGS
- Meas: 52x36x37cm 2376pcs/20FCL

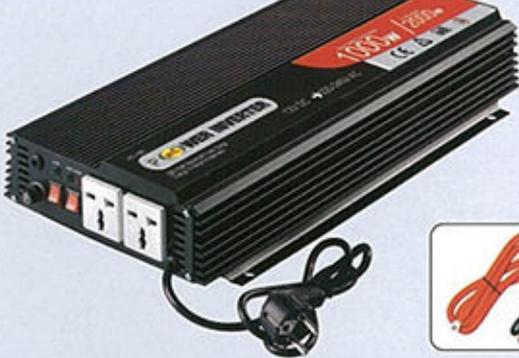

**POWER INVERTER WITH CHARGER**

**PC-1000/1500/2000**

- Continuous Power: 1000W/1500W/2000W
- Surge Power: 2000W/3000W/4000W
- Input Voltage: 12V or 24V
- Output Voltage And Frequency: 110VAC(60+/-2%)HZ  
200-240VAC(50+/-2%)HZ
- Output Waveform: Modified Sine Wave
- Efficiency: >90%
- Charge Current: 10-30A
- Output Overloading Protection
- Low Input Voltage Alarm/ Low Input Voltage Protection
- Overloading Protection/ Short Circuit Protection
- Over Temperature Protection
- Inner Packing: gift box
- Outer Packing(cm): 54x47x24 4PCS/CTN FOR HIC-1000  
53x55x25 4PCS/CTN FOR HIC-1500  
62x55x24 4PCS/CTN FOR HIC-2000



**POWER INVERTER WITH CHARGER**

**PC-3000/4500/5000**

- Continuous Power: 3000W/4000W/5000W
- Surge Power: 6000W/8000W/10000W
- Input Voltage: 12V or 24V
- Output Voltage And Frequency: 110VAC(60+/-2%)HZ  
200-240VAC(50+/-2%)HZ
- Output Waveform: Modified Sine Wave
- Efficiency: >90%
- Charge Current: 10-30A
- Output Overloading Protection
- Low Input Voltage Alarm/ Low Input Voltage Protection
- Overloading Protection/ Short Circuit Protection
- Over Temperature Protection
- Inner Packing: gift box
- Outer Packing(cm): 56x35x25 2PCS/CTN FOR HIC-3000  
58x35x25 2PCS/CTN FOR HIC-4000  
60x35x25 2PCS/CTN FOR HIC-5000



**PC-2500(9251)**

- Continuous 2500W peak 5000w
- Input 12/24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency: >90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing: 1 pc/color box, 4pcs/ctn
- G.W./N.W.24/23KGS
- Meas: 50x48x28cm 1440pcs/20FCL






**PC-3000(9301)**

- Continuous 3000W peak 6000w
- Input 24VDC Output 100-120/220-240VAC
- Modified sine wave Efficiency: >90%
- Low and high input voltage protection
- Overloading protection
- Short circuit protection
- Packing: 1 pc/color box, 2pcs/ctn
- G.W./N.W.26/25KGS
- Meas: 50.5x49.5x23cm 1400pcs/20FCL




For Selected






# Battery Charger

## Features:



DF series battery charger for changing the voltage of the electric wire netting into the standard voltage of charging, it is specially designed for the ail-purposel. lead-acid battery, and the settled valve type sealed lead-acid battery in use, thereis the over-current protects, also the selector switch which can choose high or low speed charge conveniently.

- ▶ Input Voltage: AC220 V or AC110V 50/60Hz
- ▶ With 6V/12V or 12V/24V selector switch
- ▶ Over-current protection
- ▶ With high-low/speed selector switch



Type	Output Power		External Package Size	N.W	G.W.	Qty per Carton
	Surge	Current				
DF1771	12V	6A	42.5 × 26.0 × 47.0cm	18kg	20kg	8PCS/CTN
DF1772	12V	10A	42.5 × 26.0 × 47.0cm	20kg	22kg	8PCS/CTN
DF1773	12V / 24V	10A	44.5 × 32.0 × 16.0cm	11kg	12kg	2PCS/CTN
DF1774	12V / 24V	15A	44.5 × 32.0 × 16.0cm	14kg	15kg	2PCS/CTN
DF1775	12V / 24V	30A	41.5 × 29.0 × 22.5cm	17kg	18kg	1PCS/CTN
DF1776	6V / 12V	4A	32.5 × 30.5 × 27.5cm	17kg	18kg	4PCS/CTN
DF1777	6V / 12V	6A	32.5 × 30.5 × 27.5cm	19kg	20kg	4PCS/CTN
DF1778	6V / 12V	12A	44.5 × 32.0 × 16.0cm	14kg	15kg	2PCS/CTN
DF1779	6V / 12V	20A	44.5 × 32.0 × 16.0cm	13kg	14kg	2PCS/CTN



DF1771



DF1772



DF1773



DF1779



# Step up/down Transformer

## Features:



THG-type step-up & down transformer is specially designed for such electronic equipment whose rated AC voltage different from that of the local netvoltage. They are safe for use within the rated voltage range.

- ▶ Input Voltage: AC110V or 220V 50/60Hz
- ▶ With fuse protector
- ▶ Output Voltage: AC110V or 220V 50/60Hz
- ▶ Built-in AC110V/220V voltage selector switch

ZL 00 3 06378.X



Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
THG-100	100W	48.0 × 26.5 × 17.5cm	18kg	20kg	16PCS/CTN
THG-200	200W	48.0 × 29.5 × 17.5cm	26kg	28kg	16PCS/CTN
THG-300	300W	31.5 × 29.5 × 21.0cm	20kg	22kg	8PCS/CTN
THG-500	500W	33.5 × 29.5 × 21.0cm	25kg	26.5kg	8PCS/CTN
THG-750	750W	43.0 × 21.0 × 20.5cm	22kg	24kg	6PCS/CTN
THG-1000	1000W	46.5 × 24.5 × 22.0cm	14.5kg	16kg	2PCS/CTN
THG-1500	1500W	46.5 × 25.5 × 22.0cm	17kg	18.5kg	2PCS/CTN
THG-2000	2000W	46.5 × 27.5 × 22.0cm	22kg	23.5kg	2PCS/CTN
THG-3000	3000W	46.5 × 29.5 × 22.0cm	26kg	27.5kg	2PCS/CTN
THG-4000	4000W	25.0 × 22.5 × 18.5cm	22kg	23kg	1PCS/CTN
THG-5000	5000W	26.0 × 22.5 × 18.5cm	24kg	25kg	1PCS/CTN
THG-10000	10000W	42.5 × 32.0 × 30.0cm	34kg	36kg	1PCS/CTN



THG-100



THG-2000



THG-3000



THG-5000



# Step up/down Transformer

## Features:



TC-type step-up & down transformer is specially designed for such electronic equipment whose rated AC voltage different from that of the local netvoltage. They are safe for use within the rated voltage range.

- ▶ Input voltage: AC110V or 220V
- ▶ With double-connector power cord
- ▶ Output voltage: AC220V or 110V

ZL 00 3 06384.4



Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
TC-100	100W	44.0×25.5×17.5cm	17kg	18.5kg	16PCS/CTN
TC-200	200W	44.5×25.5×17.5cm	24kg	25.5kg	16PCS/CTN
TC-300	300W	28.5×26.5×21.0cm	19kg	20.5kg	8PCS/CTN
TC-500	500W	28.5×26.5×21.0cm	24kg	25.5kg	8PCS/CTN
TC-750	750W	40.0×18.0×20.5cm	21kg	23kg	4PCS/CTN
TC-1000	1000W	46.5×24.5×22.0cm	14.5kg	16kg	2PCS/CTN
TC-1500	1500W	46.5×25.5×22.0cm	17kg	18.5kg	2PCS/CTN
TC-2000	2000W	46.5×27.5×22.0cm	22kg	23.5kg	2PCS/CTN
TC-3000	3000W	46.5×29.5×22.0cm	26kg	27.5kg	2PCS/CTN
TC-4000	4000W	25.0×22.5×18.5cm	22kg	23kg	1PCS/CTN
TC-5000	5000W	26.0×22.5×18.5cm	24kg	25kg	1PCS/CTN
TC-10000	10000W	42.5×32.0×30.0cm	34kg	36kg	1PCS/CTN



TC-100



TC-300



TC-2000



TC-5000



# Automatic Voltage Regulator

## Features:



This product is a relay - type high accuracy economic household voltage stabilizer. Using it can regulate the big range fluctuating voltage into a general voltage output. An ideal stabilized power source for modern household purpose. Low power consumption. Safe and reliable Large range of stabilization.

- ▶ Input voltage: AC160V~250V or 80V~130V
- ▶ With over current protector
- ▶ Output voltage: AC220V±8% or AC110V±8%
- ▶ With display of output voltage



Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
SVR-500	500W	47.5 × 43.5 × 19.0cm	18kg	20kg	4PCS/CTN
SVR-1000	1000W	55.0 × 45.0 × 22.0cm	21kg	23kg	4PCS/CTN
SVR-1500	1500W	45.0 × 29.0 × 22.0cm	13kg	14kg	4PCS/CTN
SVR-2000	2000W	34.5 × 30.5 × 58.5cm	20kg	22kg	2PCS/CTN
SVR-3000	3000W	34.5 × 30.5 × 58.5cm	22kg	24kg	2PCS/CTN
SVR-5000	5000W	41.0 × 30.5 × 58.5cm	34kg	36kg	2PCS/CTN



SVR-500



SVR-1500



SVR-2000



SVR-5000




# Automatic Voltage Regulator

## Features:



This product is a relay-type high accuracy household voltage stabilizer, Good for voltage regulation in wide range. it features small dimension, light weight, small distortion of output wave form, quick reaction. Ideal power source for modern household electrical appliances.

- ▶ Input voltage: AC140V~250V 50Hz/60Hz
- ▶ With 3sec/3min delay function
- ▶ With low/over-voltage protection
- ▶ Output voltage: AC220V±8%

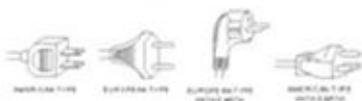

Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
AVR-500S	500W	54.5 × 31.0 × 20.0cm	14kg	16kg	4PCS/CTN
AVR-1000S	1000W	54.5 × 31.0 × 20.0cm	19kg	21kg	4PCS/CTN
AVR-1500S	1500W	31.0 × 28.5 × 20.0cm	15kg	17kg	2PCS/CTN
AVR-2000S	2000W	32.5 × 32.0 × 23.0cm	19kg	21kg	2PCS/CTN
AVR-3000S	3000W	32.5 × 32.0 × 23.0cm	24kg	26kg	2PCS/CTN
AVR-5000S	5000W	52.5 × 42.5 × 35.0cm	29kg	31kg	2PCS/CTN
AVR-7500S	7500W	41.5 × 26.5 × 34.0cm	23kg	24kg	1PCS/CTN
AVR-10000S	10000W	41.5 × 26.5 × 34.0cm	26kg	27kg	1PCS/CTN



AVR-500S



AVR-1000S



AVR-5000S



AVR-10000S



# Automatic Voltage Regulator

## Features:



This product is a relay-type high accuracy household voltage stabilizer. Using it can regulate the big range fluctuating voltage into a general voltage output. An ideal stabilized power source for modern household purpose. Low power consumption. Safe and reliable Large range of stabilization.

- ▶ Input Voltage: AC75V~130V or 180V~260V
- ▶ With over current protector
- ▶ Output Voltage: AC110V±4% or AC220V±4%
- ▶ With display of output voltage
- ▶ It has 110V/220V input voltage dialing switch



Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
AR-350	350W	51.5 × 27.0 × 38.0cm	17kg	19kg	4PCS/CTN
AR-500	500W	51.5 × 29.5 × 38.0cm	23kg	25kg	4PCS/CTN
AR-1000	1000W	34.0 × 31.0 × 43.0cm	18kg	19kg	2PCS/CTN
AR-1500	1500W	34.0 × 31.0 × 43.0cm	19kg	20kg	2PCS/CTN
AR-2000	2000W	38.0 × 34.0 × 45.0cm	20kg	21kg	2PCS/CTN
AR-3000	3000W	38.0 × 34.0 × 45.0cm	24kg	25kg	2PCS/CTN
AR-4000	4000W	40.0 × 38.0 × 51.0cm	29kg	30kg	2PCS/CTN
AR-5000	5000W	40.0 × 38.0 × 51.0cm	31kg	32kg	2PCS/CTN



AR-500



AR-1000



AR-3000



AR-5000



# Automatic Voltage Regulator



AVR-500W



AVR-1000W



AVR-1500W

### Features:



This product is a servo-actuator model high precision household purpose AC stabilized voltage power source. It has features such as little power loss, reliable running, high stabilizing accuracy etc. it is applicable for areas with large fluctuations of electric network voltages.

- ▶ Input voltage: 80V~130V/160V~250V
- ▶ It has precision 3second/3minutes time-delay function
- ▶ Output voltage: AC220V/110V±2%
- ▶ It has over-load indication protection function
- ▶ Quick starting



Type	The Rated Power	External Package Size	N.W.	G.W.	Qty Per Carton
AVR-500W	500W	68.5 × 31.0 × 22.0cm	17kg	19kg	4PCS/CTN
AVR-1000W	1000W	68.5 × 32.5 × 22.0cm	19.5kg	21.5kg	4PCS/CTN
AVR-1500W	1500W	38.5 × 32.5 × 22.0cm	12kg	14kg	2PCS/CTN



# Automatic Voltage Regulator

SVC<sub>3</sub>-10KVA

## Features:



This product is a servo motor-type high accuracy voltage stabilizer. Low power consumption. Reliable work. High accuracy of stabilization. The indispensable voltage stabilizer for factories and enterprises.

- ▶ Input voltage: AC280V~430V 50Hz
- ▶ With over current protector
- ▶ Output voltage: AC380V±4% 50Hz
- ▶ With output voltage and output current

SVC<sub>3</sub>-15KVA

Type	The Rated Output Circuit	The Rated Output Circuit	External Package Size	Weight	Qty per. Carton
SVC <sub>3</sub> -1.5	1.5KVA	2.3A	44.5×34.5×63.0cm	15kg	1PCS/CTN
SVC <sub>3</sub> -3	3KVA	4.5A	44.5×34.5×63.0cm	19kg	1PCS/CTN
SVC <sub>3</sub> -6	6KVA	9A	44.5×34.5×70.0cm	21kg	1PCS/CTN
SVC <sub>3</sub> -9	9KVA	13.6A	44.5×39.0×82.5cm	34kg	1PCS/CTN
SVC <sub>3</sub> -12	12KVA	18A	44.5×39.0×82.5cm	40kg	1PCS/CTN
SVC <sub>3</sub> -15	15KVA	22.7A	50.5×47.0×85.5cm	55kg	1PCS/CTN
SVC <sub>3</sub> -20	20KVA	30A	58.0×52.5×101.0cm	75kg	1PCS/CTN
SVC <sub>3</sub> -30	30KVA	46A	58.0×52.5×101.0cm	85kg	1PCS/CTN
SVC <sub>3</sub> -50	50KVA	76A	60.0×80.0×40.0cm	130kg	1PCS/CTN
SVC <sub>3</sub> -80	80KVA	121A	60.0×80.5×40.0cm	180kg	1PCS/CTN
SVC <sub>3</sub> -100	100KVA	152A	60.0×80.5×40.0cm	230kg	1PCS/CTN
SVC <sub>3</sub> -180	180KVA	273A	75.0×105.0×170.0cm	300kg	1PCS/CTN
SVC <sub>3</sub> -225	225KVA	342A	75.0×105.0×170.0cm	320kg	1PCS/CTN
SVC <sub>3</sub> -320	320KVA	486A	90.0×120.0×200.0cm	400kg	1PCS/CTN

SVC<sub>3</sub>-20KVA



HH950-FL01



HH950-FL02



HH950-FL03



HH950-L01



HH950-L02

GENERATOR 发电机

型号	MODEL	HH950
额定输出功率 (W)	Rated Power Output (W)	650
最大输出功率 (W)	Max Power Output(W)	750
额定电压 (V)	Rated Voltage(V)	220/110
额定电流 (A)	Rated Current(A)	3.8
频率 (Hz)	Frequency(Hz)	50/60

ENGINE 发动机

型号	MODEL	1E45
型号	Type	单缸, 二冲程 Single cylinder 2-stroke
排量	Displacement	63cc
最大功率	Max Output	2.0HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	4L

THE WHOLE 整机

型号	MODEL	HH950
启动方式	Starting System	手启动 Recoil
噪音距 7m 处	Noise Level(at 7m)	62dB
外形尺寸 (L×W×H)	Dimension(L×W×H)	380×320×320mm
净重	N.W.	17kg



HH1200-A02



HH1200-A03



HH1200-A04



HH1200-A05

## GENERATOR 发电机

型号	MODEL	HH1200
额定输出功率 (W)	Rated Power Output (W)	750
最大输出功率 (W)	Max Power Output(W)	850
额定电压 (V)	Rated Voltage(V)	220/110
额定电流 (A)	Rated Current(A)	5
频率 (Hz)	Frequency(Hz)	50/60

## ENGINE 发动机

型号	MODEL	1E45
型号	Type	单缸, 二冲程 Single cylinder 2-stroke
排量	Displacement	63cc
最大功率	Max Output	2.0HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	4.5L

## THE WHOLE 整机

型号	MODEL	HH1200
启动方式	Starting System	手启动 Recoil
噪音距 7m 处	Noise Level(at 7m)	62dB
外形尺寸 (L×W×H)	Dimension(L×W×H)	460×330×330mm
净重	N.W.	21kg



HH1500-A07



HH1500-A08



HH1500-A09



HH1500-A10

GENERATOR 发电机

型号	MODEL	HH1500
额定输出功率 (W)	Rated Power Output (W)	1000
最大输出功率 (W)	Max Power Output(W)	1100
额定电压 (V)	Rated Voltage(V)	220/110
额定电流 (A)	Rated Current(A)	5.4
频率 (Hz)	Frequency(Hz)	50/60

ENGINE 发动机

型号	MODEL	154F
型号	Type	单缸, 四冲程 Single cylinder 4-stroke
排量	Displacement	80cc
最大功率	Max Output	3.0HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	5L

THE WHOLE 整机

型号	MODEL	HH1500
机油容量	Oil Capacity	0.6L
启动方式	Starting System	手启动 Recoil
噪音距 7m 处	Noise Level(at 7m)	63dB
外形尺寸(L×W×H)	Dimension(L×W×H)	460×360×375mm
净重	N.W.	23kg



HH2215



HH2500-A1



HH2500-A2



HH2500-A3

## GENERATOR 发电机

型号	MODEL	HH2500/HH2600/HH2650
额定输出功率 (W)	Rated Power Output (W)	2000
最大输出功率 (W)	Max Power Output(W)	2200
额定电压 (V)	Rated Voltage(V)	220/110
额定电流 (A)	Rated Current(A)	9.1
频率 (Hz)	Frequency(Hz)	50/60

## ENGINE 发动机

型号	MODEL	168F
型号	Type	单缸, 四冲程 Single cylinder 4-stroke
排量	Displacement	163cc
最大功率	Max Output	5.5HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	15L

## THE WHOLE 整机

型号	MODEL	HH2500/HH2600/HH2650
启动方式	Starting System	手启动 / 电启动 Recoil/Electric
噪音距 7m 处	Noise Level(at 7m)	65dB
外形尺寸 (L×W×H)	Dimension(L×W×H)	605×430×440mm
净重	N.W.	38 kg



HH3500



HH3700



HH3750



HH4730

## GENERATOR 发电机

型号	MODEL	
额定输出功率 (W)	Rated Power Output (W)	2000
最大输出功率 (W)	Max Power Output(W)	2200
额定电压 (V)	Rated Voltage(V)	220/110
额定电流 (A)	Rated Current(A)	9.1
频率 (Hz)	Frequency(Hz)	50/60

## ENGINE 发动机

型号	MODEL	168F
型号	Type	单缸, 四冲程 Single cylinder, 4-stroke
排量	Displacement	163cc
最大功率	Max Output	5.5HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	15L

## THE WHOLE 整机

型号	MODEL	
启动方式	Starting System	手启动 / 电启动 Recoil/Electric
噪音距 7m 处	Noise Level(at 7m)	65dB
外形尺寸( L×W×H )	Dimension(L×W×H)	605×430×440mm
净重	N.W.	38kg



HH5200(3.0KW)  
HH6200(4.0KW)  
HH7200(5.0KW)



HH5600(3.0KW)  
HH6600(4.0KW)  
HH7600(5.0KW)



HH5700(3.0KW)  
HH6700(4.0KW)  
HH7700(5.0KW)



HH5750(3.0KW)  
HH6750(4.0KW)  
HH7750(5.0KW)

## GENERATOR 发电机

型号	MODEL	
额定输出功率 (W)	Rated Power Output (W)	3.0/4.0/5.0
最大输出功率 (W)	Max Power Output(W)	3.5/4.5/5.5
额定电压 (V)	Rated Voltage(V)	220
额定电流 (A)	Rated Current(A)	13.0/19.0/23.0
频率 (Hz)	Frequency(Hz)	50/60

## ENGINE 发动机

型号	MODEL	177/182/188
型号	Type	单缸, 四冲程 Single cylinder 4 stroke
排量	Displacement	242/237/389cc
最大功率	Max Output	9.0/11.0/13.0HP
油种	Fuel	汽油 Gasoline
燃油箱容量	Fuel Tank	25L

## THE WHOLE 整机

型号	MODEL	
启动方式	Starting System	手启动 / 电启动 Recoil/Electric
噪音距7m处	Noise Level(at 7m)	72dB/73dB/74dB
外形尺寸(L×W×H)	Dimension(L×W×H)	680×520×540mm
净重	N.W.	65/78/86kg



# Air cooled Diesel Generator set



5GF-B01



5GF-B02



5GF-B03

MODEL	Economical type						Luxury type						Silent type		
	2GF		3GF		5GF		2GF-SGF-LH01		2GF-SGF-LH02		2GF-SGF-LH03		5GF		
GENERATOR	Type	Revolving field type 2 pole generator													
	Frequency(HZ)	50	60	50	60	50	60	50	60	50	60	50	60	50	60
	Cont.Output(Kw)	1.7	2	2.8	3.3	4.2	5	1.7	2	2.8	3.3	4.2	5	4.2	5
	Voltage(A.C)(V)	230	240(120)	230	240(120)	230	240(120)	230	240(120)	230	240(120)	230	240(120)	230	240(120)
	Current(A.C)(V)	7.4	83(167)	12.2	138(275)	18.3	208(417)	7.4	83(167)	12.2	138(275)	18.3	208(417)	18.3	208(417)
	Engine Speed(r/min)	3000	3600	3000	3600	3000	3600	3000	3600	3000	3600	3000	3600	3000	3600
	Phase	Single/Three													
	Power factor(COS )	1													
	Excitation system	Controlled Constant Self-excitation													
	D.C output V/A	12V/8.3A													
	Operation Capacity	12 hour Constant Operation													
	Coupling Pattern	Straight shaft coupling													
		170FG		178FG		186FG		170FG(E)		178FG(E)		186FG(E)		186FG(E)	
ENGINE	Type	Direct injection Vertical,4-cycle,air-cooled diesel engine													
	Displacement cc(cu.in)	211(12.88)		296(18.06)		406(24.78)		211(12.88)		296(18.06)		406(24.78)		406(24.78)	
	Max.output(kW/rpm)	2.8	3.1	4.4	4.6	6.6	7.35	2.8	3.1	4.4	4.6	6.6	7.35	6.6	7.35
	Cont.Output(kW/rpm)	2.5	2.8	4	4.4	5.9	6.6	2.5	2.8	4	4.4	5.9	6.6	5.9	6.6
	Starting system	Recoil						Electric						Electric	
	Governor system	Centrifugal weight system													
	Fuel	Diesel light fuel(BS-AL or equivalent)													
	Fuel tank capacity(L)	2.5		3.5		5.5		7.5		15		13.55		16	
	Lube oil capacity(L)	0.8		1.1		1.65		0.8		1.65		1.1		1.65	
	Bore x Stroke(mm)	70x55		78x62		86x70		70x55		86x70		78x62		86x70	
UNIT	Protection system	Low oil,Warning System/Stop Device(not for L-series)													
	Noise level at 7m dB(A)	79		82		85		79		82		85		70	
	Dimensions(LxWxH)mm	575x400x500		640x480x530		720x480x580		575x400x500		640x480x530		720x480x580		905x520x680	
	Dry weight(kg)	46		61		95		LE:70 LH:65		LE:85 LH:80		LE:100 LH:95		165	



HH177



HH177-R



HH182-E



HH188-E



HH188-N



HH190

MODEL	HH168	HH173/HH177	HH182	HH188
Engine type	Air-cooled 4 stroke OHV single cylinder			
Bore×Stroke	68mm×45mm	73mm×58mm	82mm×64mm	88mm×64mm
Displacement	163cc	242cc	337cc	389cc
Compression ratio	8.5:1	8.2:1	8:1	8:1
Max Power output	5.5HP/3600rpm	8/9 HP/3600rpm	11HP/3600rpm	13HP/3600rpm
Max. Torque	10.8N.m/2500rpm	16.7N.m/2500rpm	23.5 N.m/2500rpm	26.4 N.m/2500rpm
Ignition system	Non-contact transistorized ignition (TCI)			
Start mode	Recoil/Electric			
Air cleaner	Semi-dry, oil bath, dual, double silent and cyclone type			
Fuel tank capacity	3.6L	6L	6.5L	6.5L
Fuel consumption	290g/HP-hour			
Engine oil capacity	0.6L	1.1L	1.1L	1.1L
Dimension (L×W×H)	380×330×375	440×365×465	480×390×490	480×390×490
Gross weight	15.5kg	28kg	34kg	34kg
20' FCL	620pcs	272pcs	272pcs	272pcs



WP-15



WP-20A



WP-20B



WP15-HP



WP-20C



WP-20EY

型号	MODEL	WP-15	WP15-HP	WP-20	WP-30
连接尺寸	Connection system	40mm (1.5")	40mm (1.5")	50mm (2")	80mm(3")
流量	Flow	21m <sup>3</sup> /h	13.5m <sup>3</sup> /h	30m <sup>3</sup> /h	60 m <sup>3</sup> /h
吸程	Suction height	7m	8m	7m	7m
扬程	Lift height	20m	70m	30m	30m
排量	Displacement	87cc	163cc	163cc	163cc
动力型号	Engine type	HH154F(3.0HP)	HH168(5.5HP)	HH168(5.5HP)	HH168(5.5HP)
机油容量	Engine oil capacity	/	0.6L	0.6L	0.6L
油箱容量	Fuel tank capacity	1.0L	3.6L	3.6L	3.6L
水泵类型	Pump type	Self-priming pump	Self-priming pump	Self-priming pump	Self-priming pump
毛重	Gross weight	17.5Kg	23.0Kg	21.6Kg	23.4Kg
体积	Dimension	450×345×360mm	520×385×470mm	470×375×385mm	510×380×405mm



WP-30A



WP-30B



WP-30C



WP-40



WP-50D




WP-80D

型号	MODEL	WP-40	WP-50D	WP-80D
连接尺寸	Connection system	100mm (4")	50mm (2")	80mm(3")
流量	Flow	80 m <sup>3</sup> /h	36m <sup>3</sup> /h	60 m <sup>3</sup> /h
吸程	Suction height	7m	8m	8m
扬程	Lift height	30m	25m	25m
排量	Displacement	242cc	211cc	296cc
动力型号	Engine type	HH177(9.0HP)	HH186D ( 13HP )	HH186D ( 13HP )
机油容量	Engine oil capacity	1.1L	1.1L	1.1L
油箱容量	Fuel tank capacity	6L	3.5L	3.5L
水泵类型	Pump type	Self-priming pump	Self-priming pump	Self-priming pump
毛重	Gross weight	32.2Kg	40.5Kg	43Kg
体积	Dimension	640×465×515mm	470×410×480mm	490×425×485mm



# PC-SERIES SINGLE-PHASE CAPACITOR-START ELECTRIC MOTOR

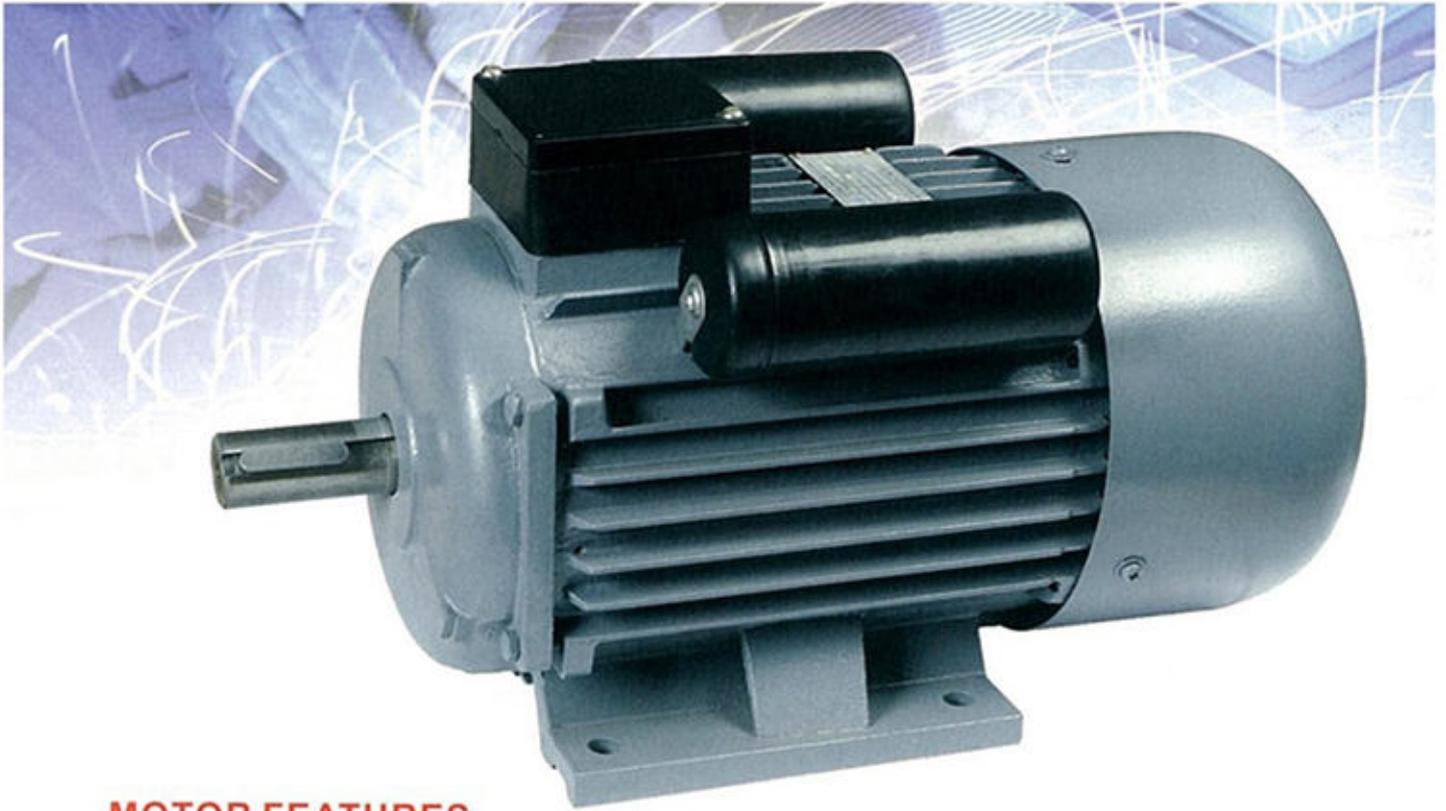

## MOTOR FEATURES


- IP44 enclosure
- Class B insulation, Class F available on request
- Low operating temperature
- High quality magnet wire
- Vacuum varnish impregnation for superior tropic proof insulation
- Continuous S1 operation
- Industrial type service factors
- Heavy duty ball bearings
- High strength cast iron frame
- Balanced rotors
- Cool running motors

## CUSTOMER BENEFITS

- Water dust and vermin resistant
- Quiet operation
- Corrosion resistant
- Reliable in country, city or factory environments
- Very low vibration
- Very low power consumption
- Superior life
- Suitable for hot environments
- Low start current and EMC interference



## PC-PL-SERIES SINGLE-PHASE ELECTRIC MOTOR

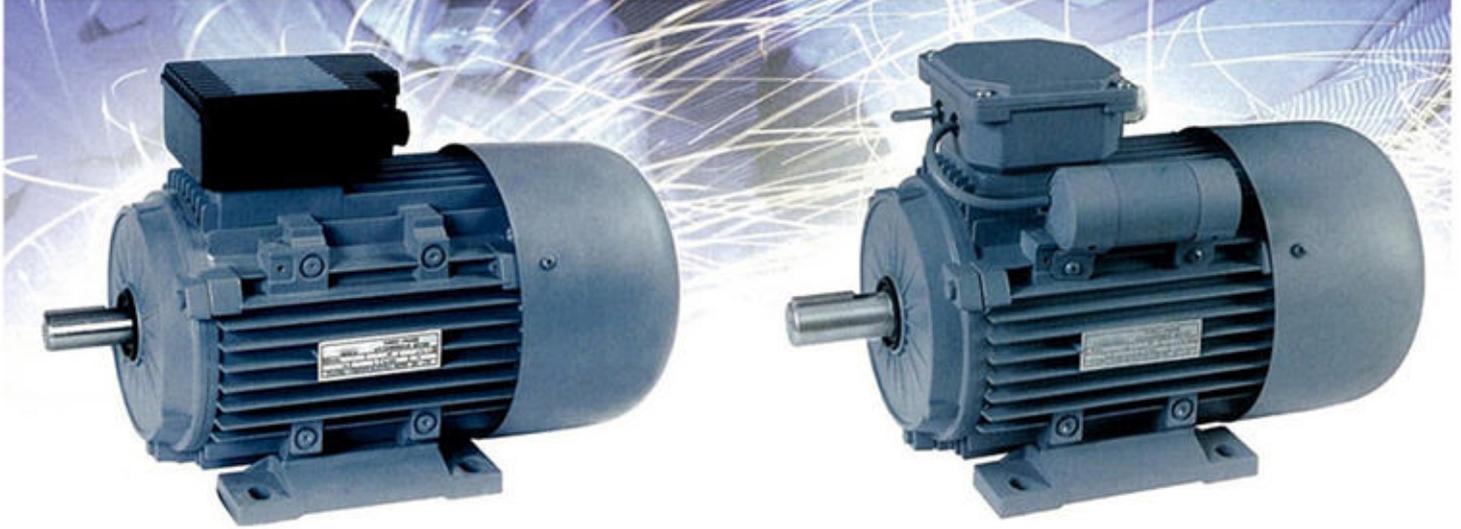

### MOTOR FEATURES


- Utilise IP55 enclosure, IP54 on request
- Multiple feet locations
- Aluminium frame, end shields and base
- High strength cable gland
- Superior paint finish
- Motors made to heavy duty service factors
- Motors made for continuous S1 duty
- Utilise vacuum impregnated Class B insulation
- Class F insulation on request
- High performance and efficiency

### CUSTOMER BENEFITS

- Water dust and vermin resistant
- Quiet operation
- Electricity saving
- Easy installation (bolt on feet or brackets as required)
- Corrosion resistant
- Dependable
- Superior life
- Reliable in country, city or factory environments



## PY-SERIES THREE-PHASE ELECTRIC MOTOR

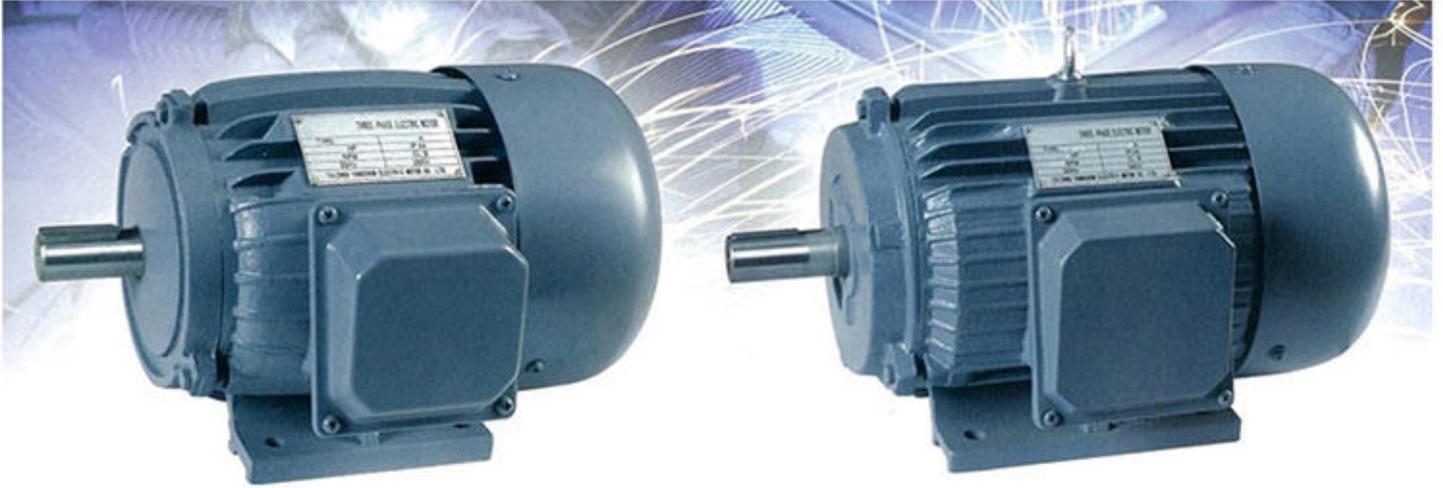

### MOTOR FEATURES

- Utilise IP44 enclosure, IP54 and IP55 is available on request
- Class B insulation with class F on request
- Motors are made with Ic0141 cooling
- Motors are made for continuous S1 duty
- Motors have high start torque
- Motors have high efficiency
- Y connection to 3 KW
- ▲ connection from 4 to 315 KW
- Voltages on request (220/380V,380/660V,220/340V,220/440V,400/415V)
- Frequency 50 or 60 HZ

### CUSTOMER BENEFITS

- Water dust and vermin resistant
- Quiet operation
- Corrosion resistant
- Reliable in country, city or factory environments
- Very low vibration
- Very low power consumption
- Superior life



## PS-SERIES THREE-PHASE ELECTRIC MOTOR



### MOTOR FEATURES

- Utilise IP55 enclosure, IP54 on request
- Multiple feet locations
- Aluminium frame, end shields and base
- High strength cable gland
- Superior paint finish
- Motors made to heavy duty service factors
- Motors made for continuous S1 duty
- Utilise vacuum impregnated Class B insulation
- Class F insulation on request
- High performance and efficiency

### CUSTOMER BENEFITS

- Water dust and vermin resistant
- Quiet operation
- Electricity saving
- Easy installation (bolt on feet or brackets as required)
- Corrosion resistant
- Dependable
- Superior life
- Reliable in country, city or factory environments



**Dayaram**  
General Trading L.L.C  
*Importers & Exporters*



**M&M**  
TRADING FZE  
*Importers / Exporters & Indentors*

+971 4 2258101

sales@dayaram.ae

www.dayaram.ae

506, AL Owais Business Towers, Deira-Dubai UAE