



**Dayaram**  
General Trading L.L.C



**HOME APPLIANCES (WHITE GOODS)**



## COMPANY OVERVIEW

Dayaram General Trading LLC is a company that buys and sells products and provides services across the international markets. Established in 1997, the company pioneered the introduction of Chinese and Taiwanese products to the Middle Eastern and African regions, excelling in both exporting and importing. Initially, Dayaram General Trading LLC focused on Readymade Garments and Sundries, partnering with reliable suppliers to procure high-quality products for export and import. (Currently, the company has significantly expanded its portfolio and market reach, leveraging a deep understanding of international trade practices, regulations, and market dynamics).

Dayaram General Trading LLC currently deals in a wide array of products, including FMCG, Electronics, Kitchenware, Readymade Garments, Daily Use Articles, Footwear, Sanitary Ware, Furniture, Mobile Phones & IT Products, Cosmetics, Construction Materials, and Carpets & Upholstery. The company effectively bridges the gap between producers and consumers in various countries, facilitating international trade and ensuring the smooth flow of goods globally.

## BUSINESS GROWTH

Dayaram General Trading LLC was established in the United Arab Emirates, a key trading hub strategically positioned to serve the GCC and African markets. It operates as the representative branch of the H. Daya Group in Hong Kong and Mainland China, under the auspices of SK. Daya International Co. Ltd. and VMD. Daya International Co. Ltd.

The H. Daya Group, renowned for overseeing production across multiple factories, is recognized as one of the largest export houses in Hong Kong and China. With offices in various locations and a dedicated team of over 200 professionals, the Group is well-positioned to manage its global operations efficiently and effectively.

## PROFESSIONAL TEAM

The Dayaram General Trading team is highly skilled in meeting the evolving needs of the market and customers. In addition to their qualified and experienced office staff, they have a team of merchandisers, both in-house and third-party, to promote their product range and introduce new products to their portfolio.



## A1 Wall Mounted Type



50Hz

AUS-07C53F010L2(7)  
AUS-07H53F010L2(7)  
AUS-09C53F010L2(b7)  
AUS-09H53F010L2(b7)  
AUS-12C53F150L2(a7)  
AUS-12H53F150L2(a7)



50Hz

AUS-18C53F120D2(a7)  
AUS-18H53F120D2(a7)  
AUS-24C53F230G5(7)  
AUS-24H53F230G5(7)  
AUS-28C53F230G5(7)  
AUS-28H53F230G5(7)



L5




L25



L4


### Turbo Operation

With this function, the air conditioner will maximize the output of cooling or heating capacity, make the room cool down or heat up rapidly, and attain the desired temperature in the shortest time.

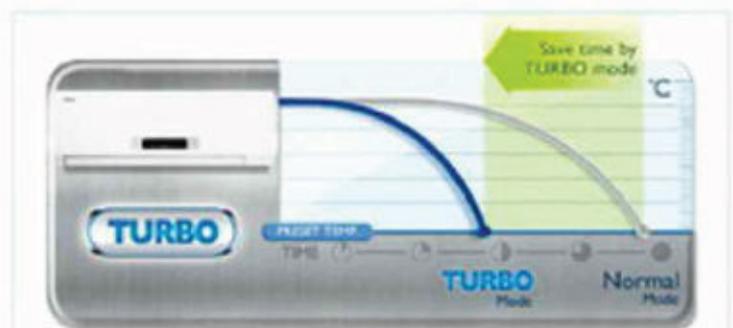



# A2 Wall Mounted Type

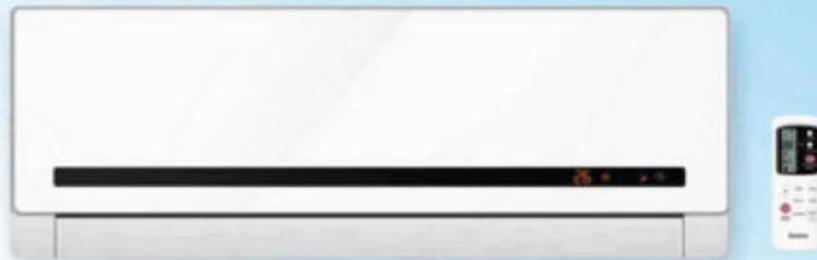

Multi color choise



**R22** 50Hz  
60Hz


- AUS-12C53F150P\*(Ta5)
- AUS-12H53F150P\*(Ta5)
- AUS-18C53F120C\*(Ta7)
- AUS-18H53F120C\*(Ta7)
- AUS-24C53F230T\*(Tb)
- AUS-24H53F230T\*(Tb)
- AUS-30C53F230T\*(Ta8)
- AUS-30H53F230T\*(Ta8)

- AUS-12C63F150P\*(Ta6)
- AUS-12H63F150P\*(Ta6)
- AUS-18C63F120N\*(Te6)
- AUS-18H63F120N\*(Te6)
- AUS-24C63F230T\*(Tb)
- AUS-24H63F230T\*(Tb)
- AUS-30C63F230T\*(Ta7)
- AUS-30H63F230T\*(Ta7)



### More Features

- Standard**
- Auto Restart
  - Auto Clean
  - Auto Defrost
  - Auto Sleep
  - Auto Filter Clean
  - Auto Mode
  - Auto Fan Speed
  - Auto Fan Stop
  - Auto Fan Start
  - Auto Fan Stop
  - Auto Fan Start
  - Auto Fan Stop
- Optional**
- Auto Restart
  - Auto Clean
  - Auto Defrost
  - Auto Sleep
  - Auto Filter Clean
  - Auto Mode
  - Auto Fan Speed
  - Auto Fan Stop
  - Auto Fan Start
  - Auto Fan Stop
  - Auto Fan Start
  - Auto Fan Stop

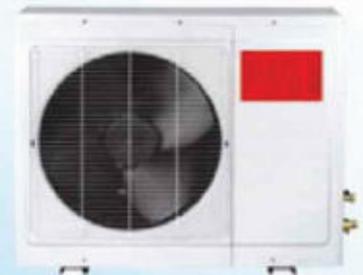



# A3 Wall Mounted Type



R22

50Hz  
60Hz

- AUS-12C53F150P\*(Ta5)
- AUS-12H53F150P\*(Ta5)
- AUS-18C53F120C\*(Ta7)
- AUS-18H53F120C\*(Ta7)
- AUS-24C53F230T\*(Tb)
- AUS-24H53F230T\*(Tb)
- AUS-30C53F230T\*(Ta8)
- AUS-30H53F230T\*(Ta8)


- AUS-12C63F150P\*(Ta6)
- AUS-12H63F150P\*(Ta6)
- AUS-18C63F120N\*(Te6)
- AUS-18H63F120N\*(Te6)
- AUS-24C63F230T\*(Tb)
- AUS-24H63F230T\*(Tb)
- AUS-30C63F230T\*(Ta7)
- AUS-30H63F230T\*(Ta7)

### More Features

Standard



Optional

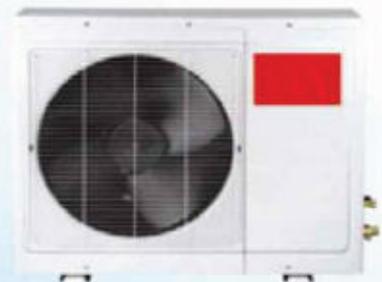



## SPECIFICATIONS

R22

50Hz

Model		AUS-12C3F150P*(T6)	AUS-12H3F150P*(T6)	AUS-18C3F120C*(T6)	AUS-18H3F120C*(T6)	AUS-24C3F230T*(T6)	AUS-24H3F230T*(T6)	AUS-30H3F230T*(T6)	
<b>Capacity</b>									
BTU/h	Cooling	12000	12000	18000	18000	24000	24000	30000	
	Heating	/	12500	/	18500	/	24500	31000	
<b>Electrical</b>									
Power Supply(V,Hz,Ph)		220-240V,50Hz,1Ph							
Rated Input(W)	Cooling	1200	1200	2020	2020	3000	3000	3630	
	Heating	/	1200	/	1880	/	3100	3600	
Rated Current(A)	Cooling	5.5	5.5	8.8	8.8	13	13	15.8	
	Heating	/	5.5	/	8.5	/	13.5	15.8	
<b>Performance</b>									
EER(W/W)		2.67	2.67	2.61	2.61	2.65	2.65	2.71	
		/	2.96	/	2.82	/	2.75	2.86	
Noise dB(A)	Indoor(Lo/Mid/H)	34/37/40	34/37/40	37/40/43	37/40/43	45/48/51	45/48/51	45/48/51	
	Outdoor	50	50	56	56	60	60	60	
Air Flow Volume(m <sup>3</sup> /h)		450	450	850	850	1100	1100	1100	
Dehumidifying(L/h)		1.2	1.2	2.2	2.2	2.2	2.2	2.2	
<b>Dimension &amp; Weight</b>									
Unit Dimension WxDxH(mm)	Indoor	800*290*186	800*290*186	890*293*203	890*293*203	1080*330*220	1080*330*220	1080*330*220	
	Outdoor	745*552*328	745*552*328	770*520*280	770*520*280	910*690*370	910*690*370	910*690*370	
Packing Dimension WxDxH(mm)	Indoor	855*355*255	855*355*255	920*360*270	920*360*270	1165*405*300	1165*405*300	1165*405*300	
	Outdoor	800*605*370	800*605*370	910*620*380	910*620*380	1010*765*430	1010*765*430	1010*765*430	
Net Weight(Kg)	Indoor	10	10	12	12	17	17	17	
	Outdoor	29	30	39	41	59	60	60	
Gross Weight(Kg)	Indoor	11.5	11.5	14	14	20	20	20	
	Outdoor	32.5	33.5	42.5	44.5	64	65	65	
<b>Installation &amp; Loading</b>									
External Piping(mm,inch)	Liquid	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	9.52(3/8")	9.52(3/8")	9.52(3/8")	
	Gas	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	15.88(5/8")	15.88(5/8")	15.88(5/8")	
Applicable Area(m <sup>2</sup> )		14-21	14-21	20-28	20-28	22-43	22-43	22-43	
20"40"40WQ(set)		112/240/280	112/240/280	94/193/233	94/193/233	63/132/145	63/132/145	63/132/145	

Remark: The above designs and specifications might be changed without prior notice for product improvement.

## SPECIFICATIONS

R22

60Hz

Model		AUS-12C3F150P*(T6)	AUS-12H3F150P*(T6)	AUS-18C3F120P*(T6)	AUS-18H3F120P*(T6)	AUS-24C3F230T*(T6)	AUS-24H3F230T*(T6)	AUS-30H3F230T*(T6)	
<b>Capacity</b>									
BTU/h	Cooling	12000	12000	18000	18000	24000	24000	30000	
	Heating	/	12700	/	19000	/	25000	31000	
<b>Electrical</b>									
Power Supply(V,Hz,Ph)		208-230V,60Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph	220-240V,50Hz,1Ph	
Rated Input(W)	Cooling	1280	1280	2200	2200	2650	2650	3630	
	Heating	/	1300	/	1800	/	2700	3600	
Rated Current(A)	Cooling	5.8	5.8	10.5	10.5	12	12	15.8	
	Heating	/	6	/	7.8	/	13	15.8	
<b>Performance</b>									
Noise dB(A)	Indoor(Lo/Mid/H)	38/40/42	38/40/42	42/46/49	42/46/49	43/46/50	43/46/50	45/48/51	
	Outdoor	51	51	56	56	59	59	60	
Air Flow Volume(m <sup>3</sup> /h)		460	460	900	900	1100	1100	1100	
Dehumidifying(L/h)		1.2	1.2	2.1	2.1	2.8	2.8	2.2	
<b>Dimension &amp; Weight</b>									
Unit Dimension WxDxH(mm)	Indoor	800*290*186	800*290*186	933*292*220	933*292*220	1080*330*220	1080*330*220	1080*330*220	
	Outdoor	700*540*255	700*540*255	770*520*280	770*520*280	910*690*370	910*690*370	910*690*370	
Packing Dimension WxDxH(mm)	Indoor	855*355*255	855*355*255	995*360*290	995*360*290	1165*405*300	1165*405*300	1165*405*300	
	Outdoor	800*605*370	800*605*370	910*620*380	910*620*380	1010*765*430	1010*765*430	1010*765*430	
Net Weight(Kg)	Indoor	10	10	14	14	17	17	17	
	Outdoor	29	30	30	30	59	60	60	
Gross Weight(Kg)	Indoor	11.5	11.5	16	16	20	20	20	
	Outdoor	32.5	33.5	42.5	42.5	64	65	65	
<b>Installation &amp; Loading</b>									
External Piping(mm,inch)	Liquid	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	9.52(3/8")	9.52(3/8")	9.52(3/8")	
	Gas	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	15.88(5/8")	15.88(5/8")	15.88(5/8")	
Applicable Area(m <sup>2</sup> )		14-21	14-21	20-32	20-32	22-43	22-43	22-43	
20"40"40WQ(set)		112/240/280	112/240/280	92/192/217	92/192/217	63/132/147	63/132/147	63/132/145	

Remark: The above designs and specifications might be changed without prior notice for product improvement.



# A4 Wall Mounted Type



**R22** 50Hz  
60Hz

- AUS-12C53F150L2(Ta5)
- AUS-12H53F150L2(Ta5)
- AUS-18C53F120D2(Te)
- AUS-18H53F120D2(Te)
- AUS-24C53F230G5(Tb)
- AUS-24H53F230G5(Tb)
- AUS-30C53F230G5(Ta7)
- AUS-30H53F230G5(Ta7)
- AUS-36C53F330S5(Tf7)
- AUS-36H53F330S5(Tf7)



- AUS-12C63F150L2(Ta6)
- AUS-12H63F150L2(Ta6)
- AUS-18C63F120D2(Ta7)
- AUS-18H63F120D2(Ta7)
- AUS-24C63F230G5(Tb)
- AUS-24H63F230G5(Tb)
- AUS-30C63F230G5(Ta7)
- AUS-30H63F230G5(Ta7)
- AUS-36C63F330S5(Tf7)
- AUS-36H63F330S5(Tf7)

### More Features

Standard



Optional

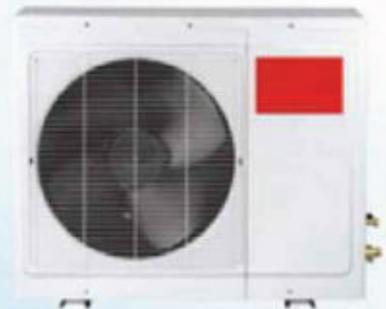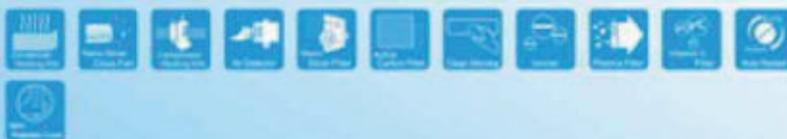



## SPECIFICATIONS

**R22** 50Hz

Model		AUS-12CS3F150L2(Ta5)	AUS-12HS3F150L2(Ta5)	AUS-18CS3F1200Q2(Te)	AUS-18HS3F1200Q2(Te)	AUS-24CS3F230G5(Tb)
<b>Capacity</b>						
BTU/h	Cooling	12000	12000	18000	18000	24000
	Heating	/	12500	/	18500	/
<b>Electrical</b>						
Power Supply(V/Hz/Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph
Rated Input(W)	Cooling	1200	1200	2300	2300	3000
	Heating	/	1200	/	1900	/
Rated Current(A)	Cooling	5.5	5.5	10	10	13
	Heating	/	5.5	/	8.3	/
<b>Performance</b>						
EER(W/W)		2.67	2.67	2.65	2.65	2.67
COP(W/W)		/	2.96	/	2.86	/
Noise dB(A)	Indoor(Lo/Mid/Hi)	34/37/40	34/37/40	37/40/43	37/40/43	51/48/45
	Outdoor	49	49	56	56	60
Air Flow Volume(m <sup>3</sup> /h)		450	450	650/700/850	650/700/850	1100
Dehumidifying(L/h)		1.2	1.2	1.2	1.2	3.2
<b>Dimension &amp; Weight</b>						
Unit Dimension WxHxD(mm)	Indoor	800*290*186	800*290*186	860*292*205	860*292*205	1080*330*220
	Outdoor	745*552*328	745*552*328	770*520*280	770*520*280	910*690*370
Packing Dimension WxHxD(mm)	Indoor	865*365*265	865*365*265	930*365*280	930*365*280	1180*425*300
	Outdoor	800*605*370	800*605*370	910*620*380	910*620*380	1010*765*430
Net Weight(Kg)	Indoor	10	10	11	11	15
	Outdoor	32	33	39	41	59
Gross Weight(Kg)	Indoor	11.5	11.5	13	13	18.5
	Outdoor	35.5	36.5	42.5	44.5	64
<b>Installation &amp; Loading</b>						
External Piping(mm,Inch)	Liquid	6.35(1/4")	6.35(1/4")	6.35(1/4")	6.35(1/4")	9.52(3/8")
	Gas	12.7(1/2")	12.7(1/2")	12.7(1/2")	12.7(1/2")	15.88(5/8")
Applicable Area(m <sup>2</sup> )		13-21	13-21	20-32	20-32	22-43
20/40/40WQ(set)		111/238/275	111/238/275	96/196/222	96/196/222	60/128/143

Remark: The above designs and specifications might be changed without prior notice for product improvement.

## SPECIFICATIONS

**R22** 50Hz

Model		AUS-24HS3F230G5(Tb)	AUS-30CS3F230G5(Ta8)	AUS-30HS3F230G5(Ta8)	AUS-36CS3F330G5(TT7)	AUS-36HS3F330G5(TT7)
<b>Capacity</b>						
BTU/h	Cooling	24000	30000	30000	36000	36000
	Heating	26000	/	31000	/	36500
<b>Electrical</b>						
Power Supply(V/Hz/Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph
Rated Input(W)	Cooling	3000	3630	3630	3950	3950
	Heating	3100	/	3600	/	4050
Rated Current(A)	Cooling	13	15.8	15.8	17.2	17.2
	Heating	13.5	/	15.8	/	17.6
<b>Performance</b>						
EER(W/W)		2.67	2.71	2.71	2.66	2.66
COP(W/W)		2.65	/	2.75	/	2.70
Noise dB(A)	Indoor(Lo/Mid/Hi)	51/48/45	50/48/43	50/48/43	52/48/45	52/48/45
	Outdoor	60	60	60	60	60
Air Flow Volume(m <sup>3</sup> /h)		1100	1100	1100	1200	1200
Dehumidifying(L/h)		3.2	3.6	3.6	4.5	4.5
<b>Dimension &amp; Weight</b>						
Unit Dimension WxHxD(mm)	Indoor	1080*330*220	1080*330*220	1080*330*220	1250*325*230	1250*325*230
	Outdoor	910*690*370	910*690*370	910*690*370	935*805*420	935*805*420
Packing Dimension WxHxD(mm)	Indoor	1180*425*300	1180*425*300	1180*425*300	1320*415*325	1320*415*325
	Outdoor	1010*765*430	1010*765*430	1010*765*430	1030*890*480	1030*890*480
Net Weight(Kg)	Indoor	15	15	15	17	17
	Outdoor	60	59	60	78	80
Gross Weight(Kg)	Indoor	18.5	20	20	21	21
	Outdoor	65	64	65	88	90
<b>Installation &amp; Loading</b>						



# B/D Floor Standing Type

**R22** 50Hz


- AUF-24C53F230B1(Tb)
- AUF-24H53F230B1(Tb)
- AUF-30C53F330B1(Ta6)
- AUF-30H53F330B1(Ta6)
- AUF-36C53F330D\*(T)
- AUF-48H58F520D\*(T)

**R22** 60Hz

- AUF-24C63F230B1(Tb)
- AUF-24H63F230B1(Tb)
- AUF-36C63F330D\*(Tf7)
- AUF-48H63F520D\*(T)



D2

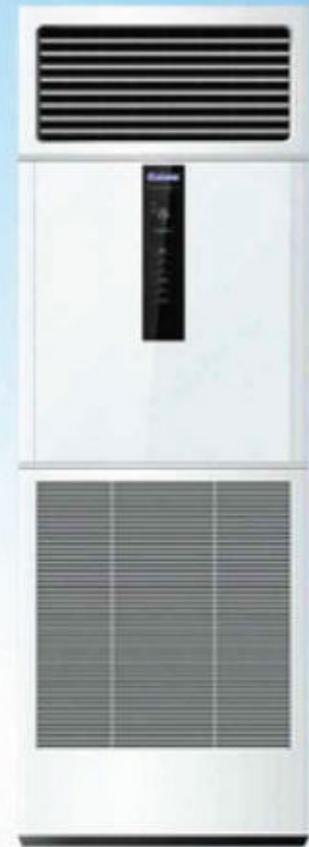

D4

## SPECIFICATIONS

**R22** 50Hz

Model		AUF-24C53F230B1(Tb)	AUF-30C53F330B1(Ta6)	AUF-36C53F330D2(Tf7)	AUF-48H58F520D2(T)
<b>Capacity</b>	Cooling	24000	30000	36000	48000
	Heating	/	/	/	/
<b>Electrical</b>					
Power Supply(V,Hz,Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	380V,50Hz,3Ph
Rated Input(W)	Cooling	3500	3850	5040	5900
	Heating	/	/	/	/
Rated Current(A)	Cooling	17	17.1	22.3	10.5
	Heating	/	/	/	/
<b>Performance</b>					
EEr(W/W)		2.00	2.03	2.05	2.03
COP(W/W)		/	/	/	/
Noise dB(A)	Indoor(Lo/Md/Hi)	40/43/48	43/49	52	52
	Outdoor	57	57	60	62
Air Flow Volume(m <sup>3</sup> /h)		1000	1000	1900	1900
Dehumidifying(L/h)		3.2	0.8	1.2	4.8
<b>Dimension &amp; Weight</b>					
Unit Dimension WxHxD(mm)	Indoor	1680*480*255	1680*480*255	1900*600*350	1900*600*350
	Outdoor	910*690*370	880*790*360	880*790*360	928*970*345
Packing Dimension WxHxD(mm)	Indoor	1795*585*345	1795*585*345	2040*770*445	2040*770*445
	Outdoor	1010*760*430	1030*890*480	1030*890*480	1095*1070*470
Net Weight(Kg)	Indoor	37	37	60	60
	Outdoor	59	68	80	85



# Floor Standing



H16



B



D2



## SPECIFICATIONS

Model		AUF-36CS3F330D*(T17)	AUF-36HS3F330D*(T17)	AUF-42CS8F520D4	AUF-42HS8F520D4
<b>Capacity</b>					
BTU/h	Cooling	36000	36000	42000	42000
	Heating	/	37532	/	46000
<b>Electrical</b>					
Power Supply(V,Hz,Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	380V,50Hz,3Ph	380V,50Hz,3Ph
Rated Input(W)	Cooling	4200	4200	4800	4800
	Heating	/	4200	/	4800
Rated Current(A)	Cooling	18.6	18.6	8.3	8.3
	Heating	/	18.6	/	9.7
<b>Performance</b>					
EER(W/W)		2.30	2.30	2.5	2.5
COP(W/W)		/	2.62	/	2.81
Noise dB(A)	Indoor(Lo/Mid/Hi)	52	52	52	52
	Outdoor	60	60	62	62
Air Flow Volume(m <sup>3</sup> /h)		1900	1900	1900	1900
Dehumidifying(L/h)		3.6	3.6	4.8	4.8
<b>Dimension &amp; Weight</b>					
Unit Dimension WxHxD(mm)	Indoor	600*1900*350	600*1900*350	600*1900*350	600*1900*350
	Outdoor	790*880*360	790*880*360	970*928*345	970*928*345
Packing Dimension WxHxD(mm)	Indoor	2040*445*770	2040*445*770	2040*445*770	2040*445*770
	Outdoor	1030*890*480	1030*890*480	1095*470*1070	1095*470*1070
Net Weight(Kg)	Indoor	60	60	60	60
	Outdoor	80	80	83	85



# H1/J1 Window Type

**R22** 50Hz  
60Hz

- AW-18CM53FH1(Ta8)
- AW-24CM53FJ1(Ta8)
- AW-18CM63FH1(Ta8)
- AW-24CM63FJ1(Ta8)



## SPECIFICATIONS

**R22** 50Hz  
60Hz

Model		AW-18CM53FH1(Ta8)	AW-24CM53FJ1(Ta8)	AW-18CM63FH1(Ta8)	AW-24CM63FJ1(Ta8)
<b>Capacity</b>					
BTU/h	Cooling	18000	24000	18000	24000
	Heating	/	/	/	/
<b>Electrical</b>					
Power Supply(V/Hz/Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph
Rated Input(W)	Cooling	2060	2700	2060	3180
	Heating	/	/	/	/
Rated Current(A)	Cooling	9.3	12.3	10	12.3
	Heating	/	/	/	/
<b>Performance</b>					
EER(W/W)		2.48	2.52	2.48	2.14
CEP(W/W)		/	/	/	/
Noise dB(A)	Indoor(Lo/Mid/Hi)	54	60	54	60
	Outdoor	59	70	59	70
Air Flow Volume(m <sup>3</sup> /h)		920	950	920	950
Dehumidifying(L/h)		1.3	2.2	1.3	2.2
<b>Dimension &amp; Weight</b>					
Unit Dimension WxHxD(mm)	Indoor	695*660*430	695*660*430	695*660*430	695*660*430
	Outdoor	/	/	/	/
Packing Dimension WxHxD(mm)	Indoor	770*735*510	770*735*510	770*735*510	770*735*510
	Outdoor	/	/	/	/
Net Weight(Kg)	Indoor	61	65	61	65
	Outdoor	/	/	/	/



# E4 Window Type

R22  
50Hz  
60Hz

AW-18CR53FE4(Ta7)

AW-24CR53FE4(Ta8)

AW-18CR63FE4(Te)

AW-24CR63FE4(Tb8)



## SPECIFICATIONS

R22  
50Hz  
60Hz

Model		AW-18CR53FE4(Ta7)	AW-24CR53FE4(Ta8)	AW-18CR63FE4(Te)	AW-24CR63FE4(Tb8)
<b>Capacity</b>					
BTU/h	Cooling	18000	24000	18000	24000
	Heating	/	/	/	/
<b>Electrical</b>					
Power Supply(V,Rz,Ph)		220-240V,50Hz,1Ph	220-240V,50Hz,1Ph	208-230V,60Hz,1Ph	208-230V,60Hz,1Ph
Rated Input(W)	Cooling	2060	2700	2180	3180
	Heating	/	/	/	/
Rated Current(A)	Cooling	9.3	12.3	10.25	13.5
	Heating	/	/	/	/
<b>Performance</b>					
EER(W/W)		2.45	2.52	2.34	2.14
	COP(W/W)	/	/	/	/
Noise dB(A)	Indoor(Lo/Mid/Hi)	54	60	54	60
	Outdoor	59	70	59	70
Air Flow Volume(m <sup>3</sup> /h)		920	950	920	950
Dehumidifying(L/h)		1.3	2.2	1.3	2.2
<b>Dimension &amp; Weight</b>					
Unit Dimension WxHxD(mm)	Indoor	750*670*455	750*670*455	750*670*455	750*670*455
	Outdoor	/	/	/	/
Packing Dimension WxHxD(mm)	Indoor	810*740*530	810*740*530	810*740*530	810*740*530
	Outdoor	/	/	/	/
Net Weight(Kg)	Indoor	61	65	61	65
	Outdoor	/	/	/	/
Gross Weight(Kg)	Indoor	66	70	66	70
	Outdoor	/	/	/	/
<b>Installation &amp; Loading</b>					
External Piping(mm,inch)	Liquid	/	/	/	/
	Gas	/	/	/	/
Applicable Area(m <sup>2</sup> )		16-32	21-41	16-32	21-41
20:42:42WQ(set)		84/176/220	84/176/220	84/176/220	84/176/220

Remark: The above designs and specifications might be changed without prior notice for product improvement.



## BD-150

### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Interior Glass door

Interior glass door can stop the cooling air come out when you want to see what' s inside.

#### Bright Lighting

Our bright lighting makes it easy to see what' s inside

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior



### Features

Adjustable Temperature Control	Yes
Interior Lighting	Optional
Interior Glass door	Optional
Store-more Removable Basket	1
Shelf	Optional
Condenser (Interior/External)	Optional
Defrost water Drain	Yes
Lid handle	Yes
Lock&key	Yes
Power-on light	Yes

### Certifications

CE	Yes
Reach	Yes
RoHS	Yes

### Specifications

Total Capacity	150L
Voltage Rating	220-240V/50/60Hz
Refrigerant	R134a/R600a
Foam Blowing Agent	C <sub>3</sub> H <sub>8</sub>
Net (W/D/H)	700*590*850
Packing(W/D/H)	742*570*880
Weight (Net/Gross) Kgs	36/39
Loading quantity (40HQ)	190Pcs



## BD-250

### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Interior Glass door

Interior glass door can stop the cooling air come out when you want to see what' s inside.

#### Cooling Fan

Cooling the compressor and condenser

#### Bright Lighting

Our bright lighting makes it easy to see what' s inside

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior



### Features

Adjustable Temperature Control	Yes
Interior Lighting	Optional
Interior Glass door	Optional
Store-more Removable Basket	1
Shelf	Optional
Fan beside compressor	Optional
Condenser (Interior/External)	Optional
Defrost water Drain	Yes
Lid handle	Yes
Lock&key	Yes
Power-on light	Yes

### Certifications

CE	Yes
CB	Yes
RoHS	Yes

### Specifications

Total Capacity	250L
Voltage Rating	220-240V/50/60Hz
Refrigerant	R134a/R600a
Foam Blowing Agent	C <sub>1</sub> H <sub>10</sub>
Net (W/D/H)	1030*590*845
Packing(W/D/H)	1072*570*880
Weight (Net/Gross) Kgs	45/48
Loading quantity (40HQ)	130Pcs





## BD-400

### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Interior Glass door

Interior glass door can stop the cooling air come out when you want to see what' s inside.

#### Cooling Fan

Cooling the compressor and condenser

#### Bright Lighting

Our bright lighting makes it easy to see what' s inside

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior

### Features

Adjustable Temperature Control	Yes
Interior Lighting	Optional
Interior Glass door	Optional
Store-more Removable Basket	1
Double doors / Single door	Optional
Shelf	Optional
Fan beside compressor	Yes
Condenser (Interior/External)	Optional
Defrost water Drain	Yes
Lid handle	Yes
Lock&key	Yes
Power-on light	Yes

### Certifications

CE	Yes
CB	Yes
RoHS	Yes

### Specifications

Total Capacity	400L
Voltage Rating	220-240V/50/60Hz
Refrigerant	R134a
Foam Blowing Agent	C <sub>1</sub> H <sub>10</sub>
Net (W/D/H)	1350*755*830
Packing(W/D/H)	1395*760*882
Weight (Net/Gross) Kgs	78/87
Loading quantity (40HQ)	72Pcs



## BD-800

### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Cooling Fan

Cooling the compressor and condenser

#### Bright Lighting

Our bright lighting makes it easy to see what's inside

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting.

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior

### Features

Adjustable Temperature Control	Yes
Interior Lighting	NO
Interior Glass door	NO
Store-more Removable Basket	1
Double doors	Yes
Shelf	Optional
Fan beside compressor	Yes
Interior condenser	Yes
Defrost water Drain	Yes
Lid handle	Yes
Lock&key	Yes
Power-on light	Yes

### Certifications

CCC	Yes
-----	-----

### Specifications

Total Capacity	800L
Voltage Rating	220-240V/50Hz
Refrigerant	R134a
Foam Blowing Agent	C <sub>1</sub> H <sub>10</sub>
Net (W/D/H)	1940*830*950
Packing(W/D/H)	2035*880*980
Weight (Net/Gross) Kgs	100/110
Loading quantity (40HQ)	26Pcs



## SD/SC-246YA

### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Cooling Fan

Cooling the compressor and condenser

#### Bright Lighting

Our bright lighting makes it easy to see what's inside

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior

#### Sticker Easy to make a good advertisement

Arch heat reflection tempered coated glass door is light and with goods heat preservation effect .



### Features

Adjustable Temperature Control	Yes
Outside Lighting	Optional
Store-more Removable Basket	1
Shelf	Optional
Fan beside compressor	Optional
Condenser (Interior/External)	Optional
Defrost water Drain	Yes
Lid handle	Yes
Lock&key	Yes
Power-on light	Yes

### Certifications

CE	Yes
CB	Yes
RoHS	Yes

### Specifications

Total Capacity	246L
Voltage Rating	220-240V/50/60Hz
Refrigerant	R134a/R600a
Foam Blowing Agent	C <sub>2</sub> H <sub>6</sub>
Net (W/D/H)	1095*598*930
Packing(W/D/H)	1155*655*970
Weight (Net/Gross) Kgs	51/55
Loading quantity (40HQ)	80Pcs



## BD/BC-288A

- ✦ International standard design
- ✦ Quick and deep freezing
- ✦ Mechanical temperature control with adjustable thermostat
- ✦ Environment-friendly technology
- ✦ CFC-free foaming agent
- ✦ Low energy consumption Low noise design
- ✦ Fashionable appearance
- ✦ Broad climate design(SN-T)
- ✦ Lock, handle, wheel and basket are available
- ✦ New design with indicator lights (optional)
- ✦ Internal or external condenser(optional)
- ✦ With inner sliding glass door(optional)

<b>Capacity</b>	
NET	288
<b>Performance</b>	
Climatic type(SN.N.ST.T)	SN-T
PowerV/HZ	220-240/50/60Hz
<b>Features</b>	
Temp.control(Electronic/Mechanical)	Mechanical
Temp Range(°C )	-18
Cooling Type	Direct Cooling
Defrosting	Manual
Refrigerant	R600a/R134a
Foam Blowing Agent	C <sub>1</sub> H <sub>10</sub>
Door Design	Foaming Door
Wheel	Yes
Lock&key	Yes
Basket	Yes
Condenser(Internal/External)	Optional
Inner glass door	Yes
Inner lamp	No
<b>Dimensions</b>	
NetWidth/Depth/Height/mm	1270*585*910
PackingWidth/Depth/Height/mm	1335*650*950
WeightNet/Packing/kg	59/63
Loading 40'HQ	75Pcs



## SD/SC-266A



### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Cooling Fan

Cooling the compressor and condenser

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior

#### Sticker Easy to make a good advertisement

#### Heat reflection tempered coated glass door is light

### Capacity

NET 266

### Performance

Climatic type(SN.N.ST.T) SN-T  
PowerV/HZ 220-240V/50/60Hz

### Features

Temp.control(Electronic/Mechanical)	Mechanical
Temp Range(°C )	-18
Cooling Type	Direct Cooling
Defrosting	Manual
Refrigerant	R600a/R134a
Foam Blowing Agent	C <sub>3</sub> H <sub>18</sub>
Door Design	Sliding Door
Wheel	Yes
Lock&key	Optional
Basket	Yes
Condenser(Internal/External)	Optional
Inner glass door	No
Inner lamp	Optional

### Dimensions

NetWidth/Depth/Height/mm	1274*590*880
PackingWidth/Depth/Height/mm	1335*650*930
WeightNet/Packing/kg	59/66



## SD/SC-506A



### Signature Features

#### Store- More Removable Basket

Convenient lift-out storage for easy access to most small frozen items or items that are most frequently accessed

#### Power-On indicator light

Know at a glance that your freezer is working

#### Cooling Fan

Cooling the compressor and condenser

#### Defrost Water Drain

Use the drain to conveniently remove water during defrosting .

#### Front-Mounted adjustable Temperature Control

Easy to adjust the temperature

#### Durable, Textured Metal Interior

#### Sticker Easy to make a good advertisement

#### Heat reflection tempered coated glass door is light

### Capacity

NET 500

### Performance

Climatic type(SN.N.ST.T) SN-T  
PowerV/HZ 220-240V/50Hz

### Features

Temp.control(Electronic/Mechanical)	Mechanical
Temp Range(°C )	-18
Cooling Type	Direct Cooling
Defrosting	Manual
Refrigerant	R134a
Foam Blowing Agent	C <sub>1</sub> H <sub>10</sub>
Door Design	Sliding Door
Wheel	Yes
Lock&key	Optional
Basket	Yes
Condenser(Internal/External)	Internal
Inner glass door	No
Inner lamp	Optional

### Dimensions

NetWidth/Depth/Height/mm	1650*750*870
PackingWidth/Depth/Height/mm	1710*820*955
WeightNet/Packing/kg	99/117
Lead time 40HQ	300--



## LC-320



- ※ International standard design
- ※ Quick and deep freezing
- ※ Mechanical temperature control with adjustable thermostat
- ※ Environment-friendly technology
- ※ CFC-free foaming agent
- ※ Low energy consumption Low noise design
- ※ Fashionable appearance
- ※ Broad climate design(SN-T)
- ※ Lock, handle, wheel and basket are available
- ※ New design with indicator lights (optional)
- ※ Internal or external condenser(optional)
- ※ With inner sliding glass door(optional)

---

### Capacity

NET	320
-----	-----

---

### Performance

Climatic type(SN.N.ST.T)	SN-T
PowerV/HZ	220-240V/50Hz

---

### Features

Temp.control(Electronic/Mechanical)	Mechanical
Temp Range(°C )	0-10°C
Cooling Type	Fan Cooling
Defrosting	Manual
Refrigerant	R134a
Foam Blowing Agent	C <sub>1</sub> H <sub>12</sub>
Door Design	Hollow Glass door
Wheel	Yes
Lock&key	Optional
Condenser(Internal/External)	Optional
Inner lamp	Yes
Sticker	Optional

---

### Dimensions

NetWidth/Depth/Height/mm	580*575*1915
PackingWidth/Depth/Height/mm	630*620*1960
WeightNet/Packing/kg	80/87
Loading 40'HQ	75Pcs

---



## LC-503

- ※ International standard design
- ※ Quick and deep freezing
- ※ Mechanical temperature control with adjustable thermostat
- ※ Environment-friendly technology
- ※ CFC-free foaming agent
- ※ Low energy consumption Low noise design
- ※ Fashionable appearance
- ※ Broad climate design(SN-T)
- ※ Lock, handle, wheel and basket are available
- ※ New design with indicator lights (optional)
- ※ Internal or external condenser(optional)
- ※ With inner sliding glass door(optional)



### Capacity

NET	503
-----	-----

### Performance

Climatic type(SN.N.ST.T)	SN-T
PowerV/HZ	220-240V/50Hz

### Features

Temp.control(Electronic/Mechanical)	Mechanical
Temp Range(°C )	0-10°C
Cooling Type	Fan Cooling
Defrosting	Manual
Refrigerant	R134a
Foam Blowing Agent	C <sub>2</sub> H <sub>22</sub>
Door Design	Hollow Glass door
Wheel	Yes
Lock&key	Optional
Condenser(Internal/External)	Internal
Inner lamp	Yes
Sticker	Optional

### Dimensions

NetWidth/Depth/Height/mm	920*557*1894
PackingWidth/Depth/Height/mm	1006*636*1980
WeightNet/Packing/kg	85/95
Loading 40'HQ	42Pcs



## Refrigerator &amp; freezer series

**BCD-335** Refrigerator & freezer series

Gross capacity (L):	335
Net capacity (L/Cu.Ft.):	304/10.1
Freezing capacity (L/Cu.Ft.):	64/2.4
Energy class:	A/A+/A++
Star rating:	<b>* A++</b>
Climate:	N-T
Dimension(mm):	595×590×1700
Loading (40'HQ):	77pcs

**Special Features**

- CFC-free
- Reversible door
- Door balcony
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover

**BCD-280** Refrigerator & freezer series

Gross capacity (L):	280
Net capacity (L/Cu.Ft.):	246/8.8
Freezing capacity (L/Cu.Ft.):	58/2.2
Energy class:	A/A+
Star rating:	<b>* A+</b>
Climate:	N-T
Dimension(mm):	550×568×1700
Loading (40'HQ):	106pcs

**Special Features**

- CFC-free
- Reversible door
- Door balcony
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover



## Refrigerator &amp; freezer series

55  
cmSilver  
White45  
cmSilver  
White**BCD-210** Refrigerator & freezer series

Gross capacity (L):	218
Net capacity (L/Cu.Ft.):	210/7.5
Freezing capacity (L/Cu.Ft.):	42/1.6
Energy class:	A/A+
Star rating:	<b>***</b>
Climate:	N-T
Dimension(mm):	550x568x1410
Loading (40'HQ):	144pcs

**Special Features**

CFC-free  
 Reversible door  
 Door balcony  
 Adjustable leveling leg  
 Adjustable thermostat  
 Stylish interior light  
 Slide-out glass shelves with  
 Crystal crisper with glass cover

**BCD-138** Refrigerator & freezer series

Gross capacity (L):	148
Net capacity (L/Cu.Ft.):	138/4.9
Freezing capacity (L/Cu.Ft.):	42/1.5
Energy class:	A/A+
Star rating:	<b>***</b>
Climate:	N-T
Dimension(mm):	456x525x1304
Loading (40'HQ):	192pcs

**Special Features**

CFC-free  
 Door balcony  
 Adjustable leveling leg  
 Adjustable thermostat  
 Stylish interior light  
 Slide-out glass shelves with  
 Crystal crisper with glass cover



## Refrigerator &amp; freezer series

**BCD-108** Refrigerator & freezer series

Gross capacity (L):	118
Net capacity (L/Cu.Ft.):	108/3.8
Freezing capacity (L/Cu.Ft.):	42/1.5
Energy class:	A/A+
Star rating:	★☆☆
Climate:	N-T
Dimension(mm):	456×525×1124
Loading (40'HQ):	192pcs

**Special Features**

- CFC-free
- Door balcony
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover

**BCD-88HC** Refrigerator & freezer series

Gross capacity (L):	88
Net capacity (L/Cu.Ft.):	80/2.8
Freezing capacity (L/Cu.Ft.):	26/1.0
Energy class:	A/A+
Star rating:	★☆☆
Climate:	N-T
Dimension(mm):	456x525x850
Loading (40'HQ):	288pcs

**Special Features**

- CFC-free
- Door rack
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover



# DOUBLE DOOR REFRIGERATOR

*Refrigerator & freezer series*



45  
cm

A<sup>+</sup>



Silver

White

## BCD-88

Refrigerator & freezer series

Gross capacity (L):	88
Net capacity (L/Cu.Ft.):	80/2.8
Freezing capacity (L/Cu.Ft.):	26/1.0
Energy class:	A/A+
Star rating:	★★★★
Climate:	N-T
Dimension(mm):	456x525x850
Loading (40°HQ):	288pcs

## Special Features

- CFC-free
- Door rack
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover

DOUBLE DOOR REFRIGERATOR





## Compact refrigerator series with freezing compartment



Silver  
White



Silver  
White

### BC-200

upright refrigerator series  
with freezer compartment

Gross capacity (L):	218
Net capacity (L/Cu.Ft.):	200/7.1
Freezing capacity (L/Cu.Ft.):	20/0.7
Energy class :	A/A+
Star rating:	
Climate:	N-T
Dimension(mm):	550x568x1220
Loading (40'HQ):	160pcs

### Special Features

- CFC-free
- Reversible door
- Door balcony
- Adjustable leveling leg
- Adjustable thermostat
- Stylish interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover


### BC-126UHC

Compact refrigerator series  
with freezing compartment

Gross capacity (L):	130
Net capacity (L/Cu.Ft.):	126/4.5
Freezing capacity (L/Cu.Ft.):	12/0.4
Energy class:	A
Climate:	N-T
Dimension (mm):	520×550×830
Loading (40'HQ):	251pcs

### Special Features

- CFC-free
- Reversible door
- Door rack
- Adjustable leveling leg
- Adjustable thermostat
- Slide-out glass shelves with
- Crystal crisper with glass cover
- Interior light (optional)



## BC-248

### Larder series

Gross capacity (L):	268
Net capacity (L/Cu.Ft.):	248/8.8
Freezing capacity (L/Cu.Ft.):	/
Energy class :	A/A+
Climate:	N-T
Dimension(mm):	550x568x1410
Loading (40'HQ):	144pcs

### Special Features

- CFC-free
- Reversible door
- Door balcony
- Adjustable leveling leg
- Adjustable thermostat
- Interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover

## BC-128

### Larder series

Gross capacity (L):	140
Net capacity (L/Cu.Ft.):	128/4.5
Energy class :	A
Climate:	N-T
Dimension(mm):	520x550x830
Loading (40'HQ):	251pcs

### Special Features

- CFC-free
- Reversible door
- Door rack
- Adjustable leveling leg
- Adjustable thermostat
- Interior light
- Slide-out glass shelves with
- Crystal crisper with glass cover



# SINGLE DOOR LARDER

*Larder Series*



48  
cm



Silver  
White

## BC-70

### Larder series



Gross capacity (L):	78
Net capacity (L/Cu.Ft.):	70/2.5
Energy class :	A
Climate:	N-T
Dimension(mm):	480×450×634
Loading (40'HQ):	445pcs

## Special Features

- CFC-free
- Reversible door
- Door rack
- Adjustable leveling leg
- Adjustable thermostat
- Slide-out glass shelves with
- Crystal crisper with glass cover

SINGLE DOOR LARDER

B



## BD-180

### Freezer series

Gross capacity (L):	198
Net capacity (L/Cu.Ft.):	180/6.4
Freezing capacity (L/Cu.Ft.):	180/6.4
Energy class:	A/A+
Star rating:	<b>* **</b>
Climate:	N-T
Dimension (mm):	550x568x1410
Loading (40'HQ):	144pcs

### Special Features

- CFC-free
- Reversible door
- Adjustable leveling leg
- Adjustable thermostat
- 6 Crystal freezer drawers

## BD-146

### Freezer series

Gross capacity (L):	160
Net capacity (L/Cu.Ft.):	146/5.2
Freezing capacity (L/Cu.Ft.):	146/5.2
Energy class:	A/A+
Star rating:	<b>* **</b>
Climate:	N-T
Dimension (mm):	550x568x1220
Loading (40'HQ):	160pcs

### Special Features

- CFC-free
- Reversible door
- Adjustable leveling leg
- Adjustable thermostat
- 5 Crystal freezer drawers



## Freezer series



### BD-100

#### Freezer series

Gross capacity (L):	110
Net capacity (L/Cu.Ft.):	100/3.6
Freezing capacity (L/Cu.Ft.):	100/3.6
Energy class:	A/A+
Star rating:	★☆☆
Climate:	N-T
Dimension (mm):	550×568×845
Loading (40'HQ):	240pcs

### Special Features

- CFC-free
- Reversible door
- Adjustable leveling leg
- Adjustable thermostat
- 3 Crystal freezer drawers

### BD-80

#### Freezer series


Gross capacity (L):	88
Net capacity (L/Cu.Ft.):	80/2.8
Freezing capacity (L/Cu.Ft.):	80/2.8
Energy class:	A/A+
Star rating:	★☆☆
Climate:	N-T
Dimension(mm):	485×510×855
Loading (40'HQ):	276pcs

### Special Features

- CFC-free
- Reversible door
- Adjustable leveling leg
- Adjustable thermostat
- 3 Wire freezer drawers



## Compact refrigerator series with freezing compartment

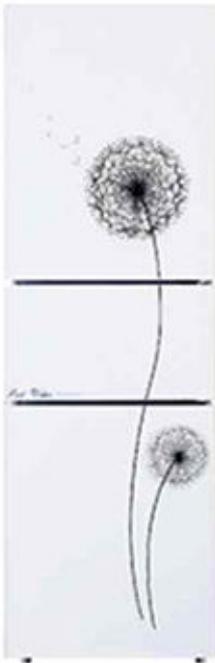

White



White

### BCD-225

combi series

Net Capacity(L):	225
Fridge Capacity(L):	120
Freezing Capacity(L):	65
Soft frozen (L):	40
Energy class:	A/A+
Star rating:	<b>* **</b>
Climate:	N-T
Dimension (mm):	550x610x1715
Loading (40'HQ):	76pcs

### Special Features

- CFC-free
- Adjustable Leveling Leg
- Adjustable thermostat
- Many Style beautiful glass door for choicing
- Low energy consumption

### BCD-182

combi series

Net Capacity(L):	182
Fridge Capacity(L):	84
Freezing Capacity(L):	60
Soft frozen (L):	38
Energy class:	A/A+
Star rating:	<b>* **</b>
Climate:	N-T
Dimension (mm):	500x560x1670
Loading (40'HQ):	106pcs

### Special Features

- CFC-free
- Adjustable Leveling Leg
- Adjustable thermostat
- Many Style beautiful glass door for choicing
- Low energy consumption



## Compact refrigerator series with freezing compartment



 Red



 White

### BCD-165CM combi series

Net Capacity(L):	165
Fridge Capacity(L):	105
Freezing Capacity(L):	60
Energy class:	A/A+
Star rating:	
Climate:	N-T
Dimension (mm):	500x560x1440
Loading (40'HQ):	105pcs

### Special Features

- CFC-free
- Adjustable Leveling Leg
- Adjustable thermostat
- Many Style beautiful glass door for choicing
- Low energy consumption

### BCD-152T combi series


Net Capacity(L):	152
Fridge Capacity(L):	97
Freezing Capacity(L):	55
Energy class:	A/A+
Star rating:	
Climate:	N-T
Dimension (mm):	500x560x1305
Loading (40'HQ):	160pcs

### Special Features

- CFC-free
- Adjustable Leveling Leg
- Adjustable thermostat
- Many Style beautiful glass door for choicing
- Low energy consumption



## Vertical Water Dispenser

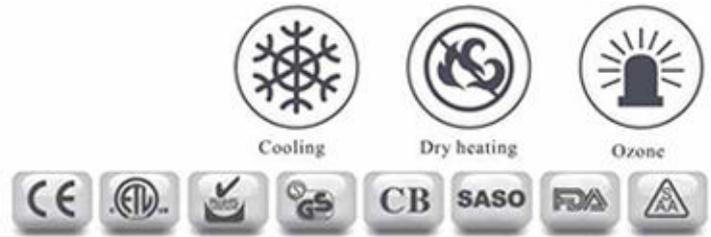

**Hidden Bottle**



### LM-YL1-122series(LCD)

PACKING DIMENSION (mm): 368×405×1090  
Loading (40'HQ):408pcs

#### LM-YL1-122B(LCD)

(Compressor cooling)  
Rated input power:  
Hot:500w, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C

### LM-YL1-122series(LED)

PACKING DIMENSION (mm): 368×405×1090  
Loading (40'HQ):408pcs

#### LM-YL1-122B(LED)


(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:500w, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C

#### LM-YL1-122B-3(LED)

(Compressor cooling, refrigerator cabinet)  
Rated input power:  
Hot:500W, Cold:95W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



## Vertical Water Dispenser

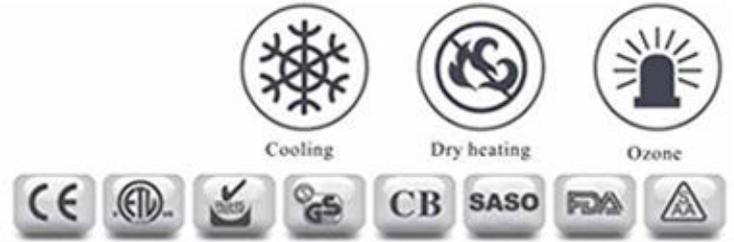

### LM-YL1-123 series

PACKING DIMENSION (mm): 355×362×1000  
Loading (40'HQ):462pcs

#### LM-YL1-123B

(Compressor cooling, storage cabinet)

Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃

#### LM-YL1-123B-3

(Compressor cooling, refrigerator cabinet)

Rated input power:  
Hot:500W, Cold:95W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃



### LM-YL1-121series

PACKING DIMENSION (mm): 346×358×950  
Loading (40'HQ):552pcs

#### LM-YL1-121B / LM-YL1-121B(LED)

(Compressor cooling)

Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88℃-95℃ Cold:6℃-10℃



Cooling



Dry heating



Ozone



## Vertical Water Dispenser



### LM-YL1-69 series(LED)

PACKING DIMENSION (mm): 368×390×1035  
Loading (40'HQ):450pcs

#### LM-YL1-69B(LED)

(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C

#### LM-YL1-69B-3(LED)

(Compressor cooling, refrigerator cabinet)  
Rated input power:  
Hot:500W, Cold:95W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



### LM-YL1-69 series (LCD)

PACKING DIMENSION (mm): 368×390×1035  
Loading (40'HQ):450pcs

#### LM-YL1-69B (LCD)


(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:1000W, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C

#### LM-YL1-69B-3(LCD)

(Compressor cooling, refrigerator cabinet)  
Rated input power:  
Hot:1000W, Cold:95W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



## Vertical Water Dispenser

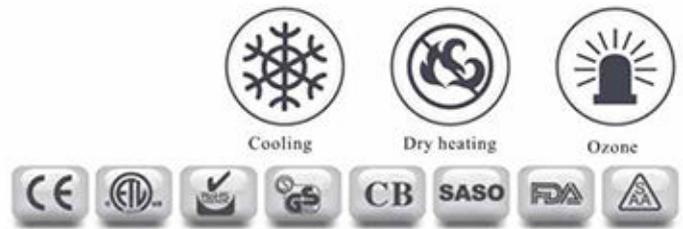

### LM-YL1-119series

PACKING DIMENSION (mm): 345×350×1010  
Loading (40'HQ):474pcs

#### LM-YL1-119B

(Compressor cooling)

Rated input power:

Hot:500W, Cold:80W

Water temperature:

Hot:88°C-95°C Cold:6°C-10°C



### LM-YL1-801 series(LED)

PACKING DIMENSION (mm): 355×362×1005  
Loading (40'HQ):462pcs

#### LM-YL1-801B(LED)

(Compressor cooling, storage cabinet)

Rated input power:

Hot:500W, Cold: 80W

Water temperature:

Hot:88°C-95°C Cold: 6°C-10°C

#### LM-YL1-801B-3(LED)

(Compressor cooling, refrigerator cabinet)

Rated input power:

Hot:500W, Cold:95W

Water temperature:

Hot:88°C-95°C Cold: 6°C-10°C



Cooling



Dry heating



Ozone

## Vertical Water Dispenser



### LM-YL1-1091series

PACKING DIMENSION (mm): 320×330×868  
Loading (40'HQ):775pcs

#### LM-YL1-1091B

(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold:6°C-10°C



### LM-YL1-109series

PACKING DIMENSION (mm): 320×330×868  
Loading (40'HQ):775pcs

#### LM-YL1-109B

(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold:6°C-10°C



Cooling



Dry heating



Ozone



## Vertical Water Dispenser



### LM-YL1-61series

PACKING DIMENSION (mm): 350×330×880  
Loading (40'HQ):714pcs

**LM-YL1-61B**  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold: 80W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃




### LM-YL1-611 series

PACKING DIMENSION (mm): 330×360×880  
Loading (40'HQ):693pcs

**LM-YL1-611B**  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold: 80W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃



## Vertical Water Dispenser

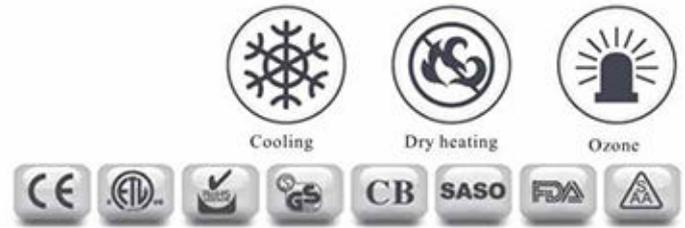

### LM-YL1-611 series

PACKING DIMENSION (mm): 355×380×880  
Loading (40'HQ):594pcs

#### LM-YL1-611B

(Compressor cooling)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



### LM-YL1-32 series

PACKING DIMENSION (mm): 330×355×880  
Loading (40'HQ):693pcs

#### LM-YL1-32A


(Electrical cooling, storage cabinet)  
Rated input power:  
Hot:500W, Cold:75W  
Water temperature:  
Hot: 88°C-95°C Cold: 10°C-15°C

#### LM-YL1-32B

(Compressor cooling, storage cabinet)  
Rated input power:  
Hot:500W, Cold: 80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



## Desktop Type Water Dispenser

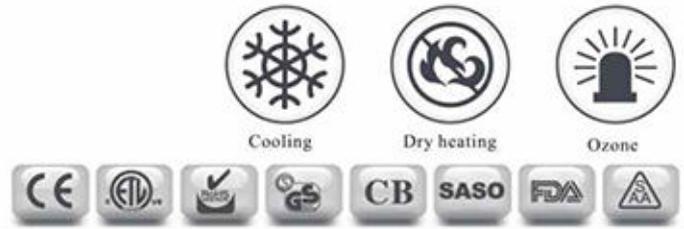

### LM-YT1-115B series

PACKING DIMENSION (mm): 365×390×565  
Loading (40'HQ):768pcs

**LM-YT1-115B**  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃




### LM-YT1-123B series

PACKING DIMENSION (mm): 365×390×575  
Loading (40'HQ):768pcs

**LM-YT1-123B**  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold:80W  
Water temperature:  
Hot:88℃-95℃ Cold: 6℃-10℃



## Desktop Type Water Dispenser

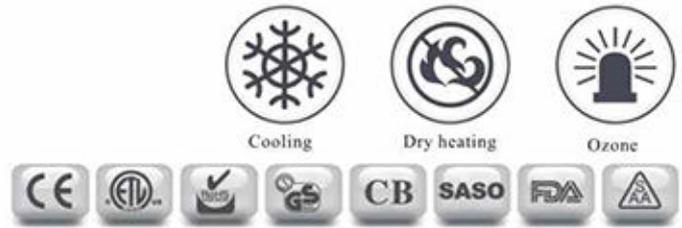

### LM-YT1-50 series (VFD)

PACKING DIMENSION (mm): 385×405×585  
Loading (40'HQ):720pcs

LM-YT1-58B  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold: 80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



### LM-YT2-57 series

PACKING DIMENSION (mm): 355×390×580  
Loading (40'HQ):840pcs

LM-YT2-57B  
(Compressor cooling)  
Rated input power:  
Hot:500W, Cold: 80W  
Water temperature:  
Hot:88°C-95°C Cold: 6°C-10°C



Cooling



Dry heating



Ozone

## Desktop Type Water Dispenser



### LM-YT1-183 series

PACKING DIMENSION (mm): 335×355×435  
Loading (40'HQ):1260pcs

**LM-YT1-183A**  
(Electrical cooling)  
Rated input power:  
Hot:500W, Cold: 75W  
Water temperature:  
Hot:88°C-95°C Cold: 10°C-15°C



### LM-YT1-62 series

PACKING DIMENSION (mm): 315×325×420  
Loading (40'HQ):1554pcs

**LM-YT1-62**  
(Warm and hot)  
Rated input power:  
Hot:500W, Cold: /  
Water temperature:  
Hot:88°C-95°C Cold: /

**LM-YT1-62A**  
(Electrical cooling)  
Rated input power:  
Hot:500W, Cold: 75W  
Water temperature:  
Hot:88°C-95°C Cold: 10°C-15°C



9 press-button option  
two inlet option  
drain pump option



### XQB80-690 XQB80-670

PACKING DIMENSION(mm):625X638X1026  
loading capacity :152pcs

Rated Capacity(kg):  
Wash:8.0 Spin:8.0  
Rated Power(w):  
Wash:420 Spin:290  
Net Weight(kg):32

#### Special Features

- LED display
- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Power-off memory function
- Quiet noise
- Stainless steel bucket
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Automatic balancing
- Water level select
- Pause option
- Thermal drying function



9 press-button option  
two inlet option  
drain pump option



### XQB80-6298

PACKING DIMENSION(mm):625X638X1026  
loading capacity :152pcs

Rated Capacity(kg):  
Wash:8.0 Spin:8.0  
Rated Power(w):  
Wash:420 Spin:290  
Net Weight(kg):32

#### Special Features

- LED display
- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Power-off memory function
- Quiet noise
- Stainless steel bucket
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Automatic balancing
- Water level select
- Pause option
- Thermal drying function



## Automatic Washing Machine



 7 press-button option  
two inlet option  
drain pump option

**XQB75-6278**

PACKING DIMENSION(mm):610X665X1010  
loading capacity :152pcs

Rated Capacity(kg):  
Wash:7.5 Spin:7.5  
Rated Power(w):  
Wash:420 Spin:290  
Net Weight(kg):31

**Special Features**

LED display with touch control type  
Mico-computer and intelligent control machine  
Four washing courses, three washing processes  
The stereoscopic new water current of three spray  
Protect to cut off the electricity when finished washing  
Power-off memory function  
Quiet noise  
Stainless steel bucket  
Tempered glass cover damping type  
The base be specially designed to avoid rat  
Special detergent foam spray function  
Automatic balancing  
Water level select  
Pause option  
Thermal drying function

 9 press-button option  
two inlet option  
drain pump option

**XQB72-8279**

PACKING DIMENSION(mm):610X665X1010  
loading capacity :152pcs

Rated Capacity(kg):  
Wash:7.2 Spin:7.2  
Rated Power(w):  
Wash:420 Spin:290  
Net Weight(kg):31

**Special Features**

LED display  
Mico-computer and intelligent control machine  
Four washing courses, three washing processes  
The stereoscopic new water current of three spray  
Protect to cut off the electricity when finished washing  
Power-off memory function  
Quiet noise  
Stainless steel bucket  
The base be specially designed to avoid rat  
Special detergent foam spray function  
Automatic balancing  
Water level select  
Pause option  
Thermal drying function



# Automatic Washing Machine



9 press-button option  
two inlet option  
drain pump option



### XQB70-1298

PACKING DIMENSION(mm):640X670X1050  
loading capacity:152pcs

Rated Capacity(kg):  
Wash:7.0 Spin:7.0  
Rated Power(w):  
Wash:420 Spin:290  
Net Weight(kg):38

#### Special Features

- LED display
- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Power-off memory function
- Quiet noise
- Stainless steel bucket
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Automatic balancing
- Water level select
- Pause option
- Heating washing function



9 press-button option  
two inlet option  
drain pump option



### XQB70-6296

PACKING DIMENSION(mm):625X640X1000  
loading capacity:152pcs

Rated Capacity(kg):  
Wash:7.0 Spin:7.0  
Rated Power(w):  
Wash:400 Spin:290  
Net Weight(kg):31

#### Special Features

- LED display
- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Power-off memory function
- Quiet noise
- Stainless steel bucket
- Tempered glass cover
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Automatic balancing
- Water level select
- Pause option
- Thermal drying function



## Automatic Washing Machine



9 press-button option  
two inlet option  
drain pump option



### XQB65-209

PACKING DIMENSION(mm):595X608X965  
loading capacity :200pcs

Rated Capacity(kg):  
Wash:6.5 Spin:6.5  
Rated Power(w):  
Wash:380 Spin:290  
Net Weight(kg):29

#### Special Features

LED display  
Mico-computer and intelligent control machine  
Four washing courses, three washing processes  
The stereoscopic new water current of three spray  
Protect to cut off the electricity when finished washing  
Power-off memory function  
Quiet noise  
Stainless steel bucket  
Tempered glass cover  
The base be specially designed to avoid rat  
Special detergent foam spray function  
Automatic balancing  
Water level select  
Pause option  
Thermal drying function



6 press-button option  
two inlet option  
drain pump option



### XQB62-8276

PACKING DIMENSION(mm):580X605X985  
loading capacity :200pcs

Rated Capacity(kg):  
Wash:6.2 Spin:6.2  
Rated Power(w):  
Wash:400 Spin:290  
Net Weight(kg):29

#### Special Features

LED display  
Mico-computer and intelligent control machine  
Four washing courses, three washing processes  
The stereoscopic new water current of three spray  
Protect to cut off the electricity when finished washing  
Power-off memory function  
Quiet noise  
Stainless steel bucket  
The base be specially designed to avoid rat  
Special detergent foam spray function  
Automatic balancing  
Water level select  
Pause option  
Thermal drying function



# Automatic Washing Machine



5 press-button option  
two inlet option  
drain pump option



### XQB60-9276

PACKING DIMENSION(mm):547X557X960  
loading capacity :200pcs

Rated Capacity(kg):  
Wash:6.0 Spin:6.0  
Rated Power(w):  
Wash:400 Spin:290  
Net Weight(kg):29

#### Special Features

- LED display
- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Power-off memory function
- Quiet noise
- Stainless steel bucket
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Automatic balancing
- Water level select
- Pause option



4 press-button option  
one inlet option  
drain pump option



### XQB50-5218

PACKING DIMENSION(mm):570X570X940  
loading capacity :216pcs

Rated Capacity (kg):  
Wash: 5.0 Spin: 5.0  
Rated Power (w):  
Wash: 380 Spin: 280  
Net Weight (kg):24

#### Special Features

- Mico-computer and intelligent control machine
- Four washing courses, three washing processes
- The stereoscopic new water current of three spray
- Protect to cut off the electricity when finished washing
- Quiet noise
- Stainless steel bucket
- The base be specially designed to avoid rat
- Special detergent foam spray function
- Transparent cover
- Automatic balancing
- Pause option



### XPB100-188S

PACKING DIMENSION(mm):890X540X1030  
loading capacity :140pcs

Rated Capacity (kg):  
Wash: 10.0 Spin: 6.0  
Rated Power (w):  
Wash: 500 Spin: 180  
Net Weight (kg): 25

#### Special Features

Fashionable design, elegance  
Knob shield protected  
Tempered glass transparent cover  
Combined wave wheel design  
Hand-rubbed water flow  
Lint filter  
Two water inlets  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



### XPB100-189S11

PACKING DIMENSION(mm):890X540X1030  
loading capacity :140pcs

Rate Capacity (kg)  
Wash:10.0 Spin:6.0  
Rate Power(w):  
Wash:500 Spin:180  
Net Weight (kg):24

#### Special Features

Fashionable design, elegance  
Tempered glass cover  
Transparent cover for option  
Combined wave wheel design  
Two water inlets  
Hand-rubbed water flow  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



## Twin-tub Washing Machine



**XPB98-286S**



**XPB98-286ST**

PACKING DIMENSION(mm):890X540X1010  
loading capacity:140pcs

Rated Capacity (kg):  
Wash: 9.8 Spin: 6.0  
Rated Power (w):  
Wash: 500 Spin: 180  
Net Weight (kg): 25

### Special Features

Fashionable design, elegance  
Knob shield protected  
Tempered glass transparent cover  
Combined wave wheel design  
Hand-rubbed water flow  
Lint filter  
Two water inlets  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters

PACKING DIMENSION(mm):890X540X1010  
loading capacity:140pcs

Rated Capacity (kg):  
Wash: 9.8 Spin: 6.0  
Rated Power (w):  
Wash: 500 Spin: 180  
Net Weight (kg): 25

### Special Features

Fashionable design, elegance  
Knob shield protected  
Tempered glass transparent cover  
Combined wave wheel design  
Hand-rubbed water flow  
Lint filter  
Two water inlets  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



## Twin-tub Washing Machine



### XPB100-189S

PACKING DIMENSION(mm):890X540X1030  
loading capacity :140pcs

Rate Capacity (kg)  
Wash:10.0 Spin:6.0  
Rate Power(w):  
Wash:500 Spin:180  
Net Weight (kg):24

#### Special Features

Fashionable design, elegance  
Combined wave wheel design  
Two water inlets  
Hand-rubbed water flow  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



### XPB95-188S

PACKING DIMENSION(mm):830X515X915  
loading capacity :168pcs

Rate Capacity (kg)  
Wash:9.5 Spin:5.2  
Rate Power(w):  
Wash:450 Spin:150  
Net Weight (kg):24.5

#### Special Features

Fashionable design, elegance  
Combined wave wheel design  
6 waterfalls currents  
Hand-rubbed water flow  
Lint filter  
Tempered Transparent glass cover  
Full plastic crust  
Mobile casters



## Twin-tub Washing Machine



**XPB88-188S**

PACKING DIMENSION(mm):830X515X915  
loading capacity :168pcs

Rate Capacity (kg)  
Wash:8.8 Spin:5.2  
Rate Power(w):  
Wash:450 Spin:150  
Net Weight (kg):23

**Special Features**

Fashionable design, elegance  
Knob shield protected  
Tempered glass cover  
Transparent cover for option  
Combined wave wheel design  
Hand-rubbed water flow  
Plastic body  
Two water inlets  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



**XPB95-158S**

PACKING DIMENSION(mm):830X515X925  
loading capacity :158pcs

Rate Capacity (kg)  
Wash:9.5 Spin:5.2  
Rate Power(w):  
Wash:450 Spin:150  
Net Weight (kg):23

**Special Features**

Fashionable design, elegance  
Knob shield protected  
Tempered glass cover  
Transparent cover for option  
Combined wave wheel design  
Hand-rubbed water flow  
Plastic body  
Two water inlets  
Full plastic crust, double layers cabinet  
The base be specially designed to avoid rat  
Mobile casters



## Twin-tub Washing Machine



**XPB68-60S**

PACKING DIMENSION(mm):800X465X880  
loading capacity :216pcs

Rate Capacity (kg)  
Wash:6.8 Spin:5.2  
Rate Power(w):  
Wash:400 Spin:150  
Net Weight (kg):19

**Special Features**

- Fashionable design, elegance
- Combined wave wheel design
- Hand-rubbed water flow
- Two water inlets
- Tempered glass cover
- Transparent cover for option
- Full plastic crust
- The base be specially designed to avoid rat



**XPB100-36S**

PACKING DIMENSION(mm):890X540X1030  
loading capacity :140pcs

Rate Capacity (kg)  
Wash:10.0 Spin:6.0  
Rate Power(w):  
Wash:500 Spin:180  
Net Weight (kg):24

**Special Features**

- Fashionable design, elegance
- Combined wave wheel design
- Two water inlets
- Hand-rubbed water flow
- Full plastic crust, double layers cabinet
- The base be specially designed to avoid rat
- Mobile casters



## Twin-tub Washing Machine



**XPB50-106S**

PACKING DIMENSION(mm):735X465X855  
loading capacity :240pcs

Rated Capacity (kg):  
Wash: 5.0 Spin: 3.5  
Rated Power (w):  
Wash: 320 Spin: 130  
Net Weight (kg):17

**Special Features**

Fashionable design, elegance  
Combined wave wheel design  
Hand-rubbed water flow  
Plastic filter  
One water inlets  
Full plastic crust



**XPB42-4288S**

PACKING DIMENSION(mm):660X380X760  
loading capacity :378pcs

Rated Capacity (kg):  
Wash: 4.2 Spin: 3.0  
Rated Power (w):  
Wash: 300 Spin: 110  
Net Weight (kg):15

**Special Features**

Fashionable design, elegance  
Combined wave wheel design  
Two water inlets  
Hand-rubbed water flow  
The base be specially designed to avoid rat



**Dayaram**  
General Trading L.L.C  
*Importers & Exporters*



**M&M**  
TRADING FZE  
*Importers / Exporters & Indentors*

+971 4 2258101

sales@dayaram.ae

www.dayaram.ae

506, AL Owais Business Towers, Deira-Dubai UAE